


**Tidal-channel migration
between 1997-2014 in relation
to the local build-up of the
subsurface, The Netherlands**

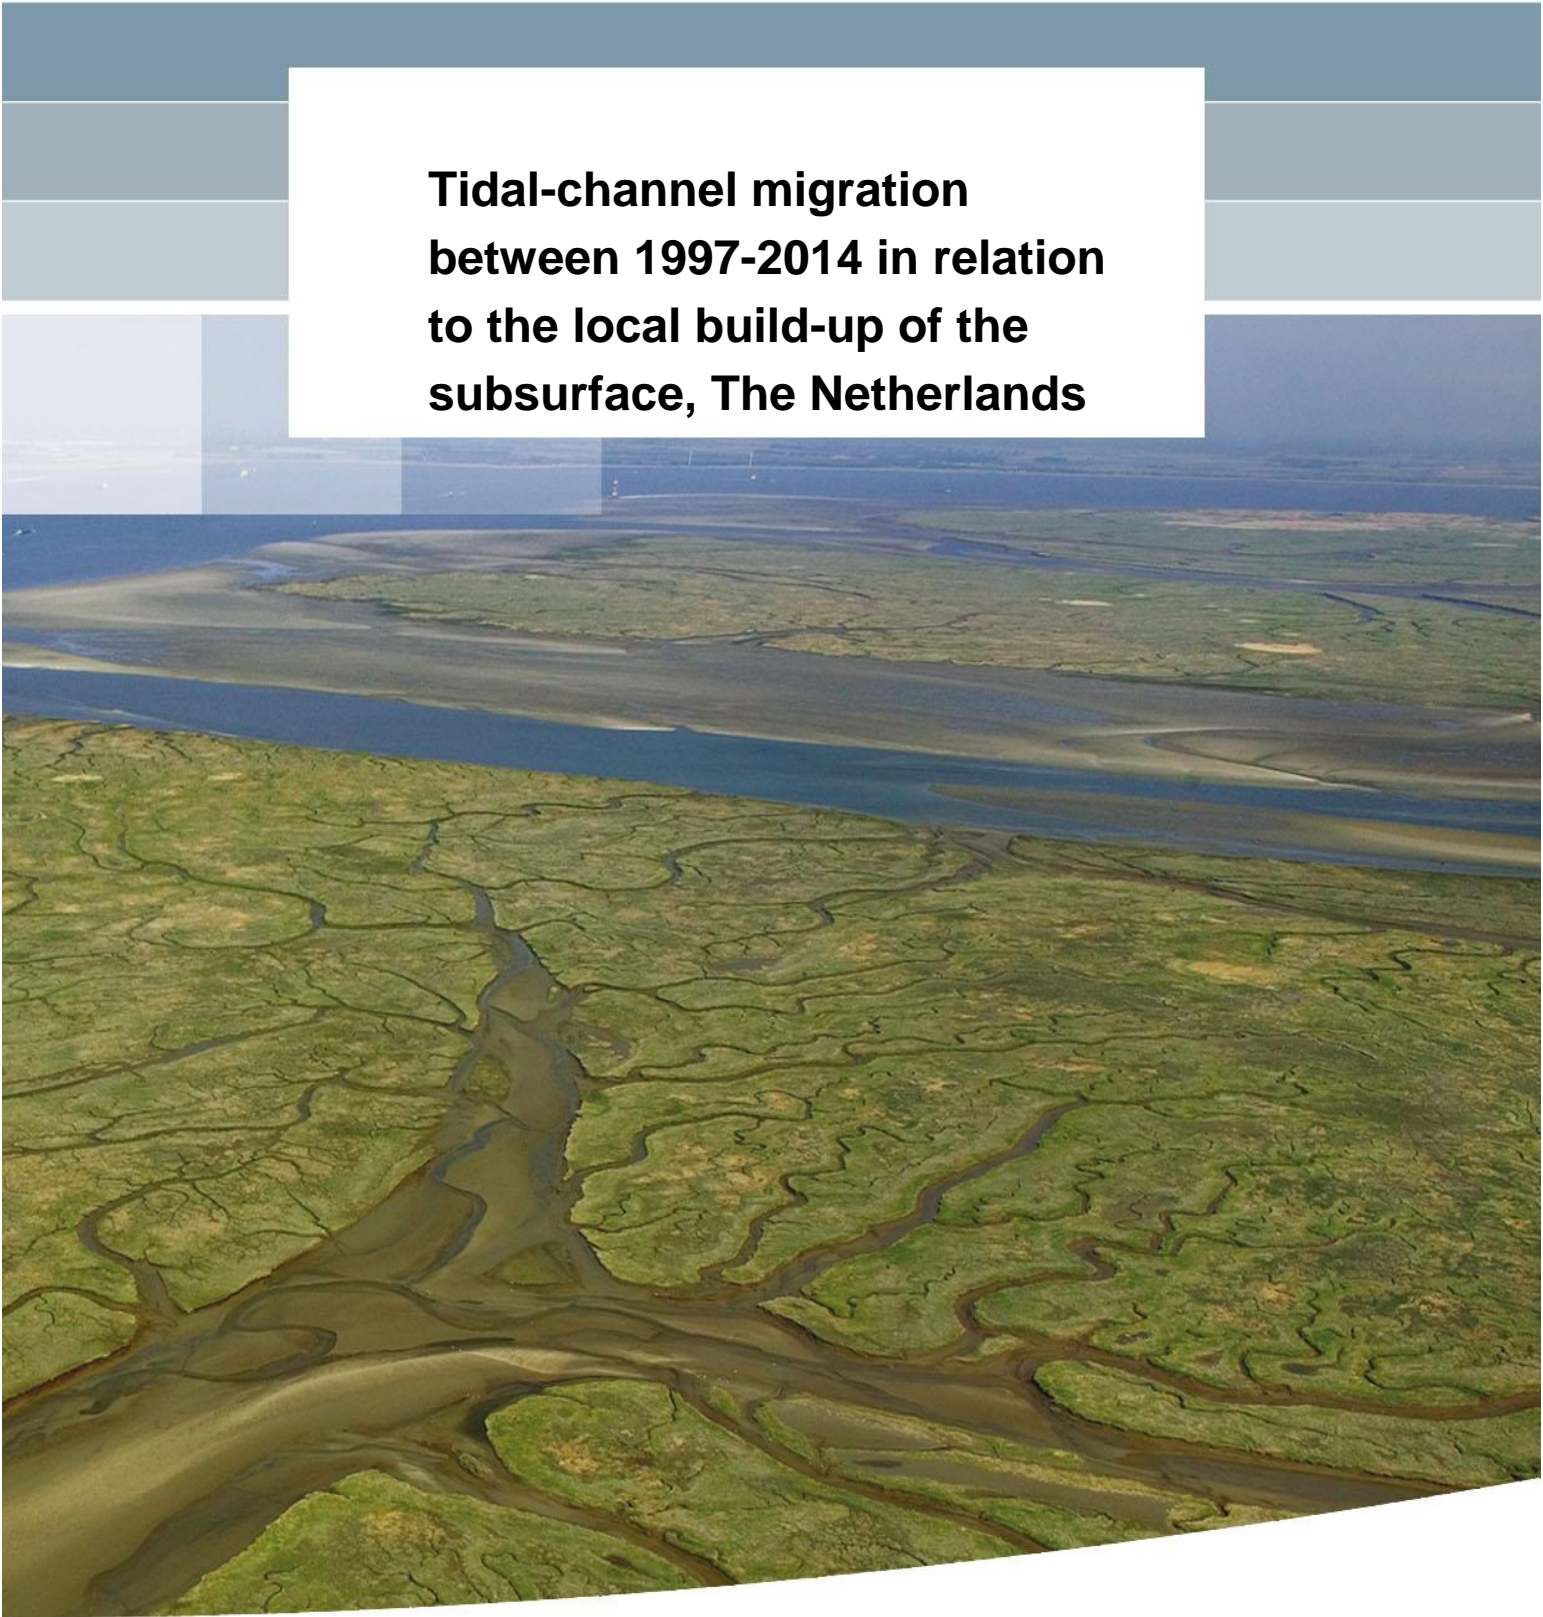

**Tidal-channel migration between
1997-2014 in relation to the local
build-up of the subsurface, The
Netherlands**

dr. M.P. Hijma

11200538-004

Title

Tidal-channel migration between 1997-2014 in relation to the local build-up of the subsurface, The Netherlands

| | | | |
|---|----------------|-----------------------|--------------|
| Client | Project | Reference | Pages |
| Rijkswaterstaat Water, Verkeer en Leefomgeving | 11200538-004 | 11200538-004-ZKS-0003 | 40 |

Keywords

Differential erodibility, migration rate, erosion-resistant deposit, coastal-zone management

| Version | Date | Author | Initials | Review | Initials | Approval | Initials |
|---------|-----------|------------|----------|-----------------|----------|-----------------|----------|
| 3 | Nov. 2017 | Marc Hijma | MH | Ad van der Spek | AVS | Frank Hoozemans | FH |
| | | | | | | | |
| | | | | | | | |

State
Final

Title

Tidal-channel migration between 1997-2014 in relation to the local build-up of the subsurface, The Netherlands

| Client | Project | Reference | Pages |
|--|----------------|-----------------------|--------------|
| Rijkswaterstaat Water, Verkeer en Leefomgeving | 11200538-004 | 11200538-004-ZKS-0003 | 41 |

Samenvatting

In Nederland, en in veel andere landen, bestaat er een grote behoefte om de kustontwikkeling in de komende jaren en decades redelijk betrouwbaar te kunnen voorspellen. Dit geldt in sterke mate voor de positie van getijdengeulen, aangezien dit relevante informatie geeft over de stabiliteit van kustverdedingswerken en de mogelijke kosten die gereserveerd moeten worden om de gewenste functies van deze werken te behouden. De voorspellingen die momenteel gemaakt worden op basis van numerieke modellen hebben echter nog niet de gewenste kwaliteit. Een van de redenen hiervoor is dat de modellen geen onderscheid (kunnen) maken tussen de verschillende typen afzetting die aanwezig zijn in het Nederlandse kustgebied en daarmee de bijbehorende verschillen in erosiegevoeligheid dus niet meenemen in hun berekeningen. Om dit te verbeteren is binnen het kader van het KPP programma B&O Kust van Rijkswaterstaat-WVL een onderzoekslijn opgezet met als overkoepelend doel het helpen verbeteren van de voorspellende waarde van de numerieke modellen door het meenemen van geologische informatie over de opbouw van de ondergrond. De hypothese waarmee gewerkt wordt is dat de aanwezigheid van erosiebestendige afzettingen leidt tot lagere migratiesnelheden van getijdengeulen en/of het tot het verhinderen van het dieper worden van een getijdengeul. Om deze hypothese te toetsen moet een belangrijk kennishiaat opgevuld worden, namelijk dat er weinig informatie is over de differentiële erosiegevoeligheid van de verschillende afzettingen. Een mogelijke manier om dit hiaat op te vullen is het afleiden van de differentiële erosiegevoeligheid uit migratiesnelheden van getijdengeulen. Dit rapport beschrijft de resultaten van een analyse van migratiesnelheden van de -6 en -15 m NAP contourlijnen van getijdengeulen over de periode 1997-2002 en 2009-2014. Deze snelheden zijn vergeleken met het bestaande overzicht van locaties waar erosiebestendige afzettingen verwacht worden. De gevonden patronen in migratiesnelheid lijken ook voor langere periodes geldig: dit volgt uit een vergelijking van de patronen met patronen in de verplaatsing van de thalweg (diepste lijn) van getijdengeulen over de laatste decennia.

Uit de analyse kan geconcludeerd worden dat 1) er grote verschillen zijn in de gemiddelde migratiesnelheid, die gedeeltelijk verklaard kunnen worden door hydrodynamische processen, maar dat vooral in het Eems-Dollard-Groningerwad gebied en de westelijke Waddenzee de relatief lage migratiesnelheden waarschijnlijk gekoppeld kunnen worden aan het voorkomen van relatief erosiebestendige afzettingen; 2) er in het Scheldegebied geen invloed lijkt te bestaan van erosiebestendige afzettingen op de gemiddelde migratiesnelheden, maar dat niet uit te sluiten valt dat dergelijke afzettingen aan de basis van de geulen wel verdieping van de geulen verhinderen en 3) de directe invloed van erosiebestendige afzettingen op migratiesnelheid momenteel niet gemakkelijk te 'bewijzen' is en dat aanvullende stappen gemaakt moeten worden om betrouwbare erosiegevoeligheidsparameters af te leiden die gebruikt kunnen worden in numerieke modellen. De belangrijkste benodigde stappen zijn 1) een uitbreiding van de hier gerapporteerde studie naar periodes voor 1997-2002 en met dieper gelegen contourlijnen, 2) een analyse van geulwandprofielen, aangezien een getrapte geulwand verwacht wordt als de wand in contact staat met erosiebestendige lagen. Onderzoek op locaties waar getrapte wanden voorkomen als gevolg van de aanwezigheid van erosiebestendige lagen zijn zeer belangrijk in het kwantificeren van differentiële erosiegevoeligheid en 3) het in een

Title

Tidal-channel migration between 1997-2014 in relation to the local build-up of the subsurface, The Netherlands

| Client | Project | Reference | Pages |
|--|----------------|-----------------------|--------------|
| Rijkswaterstaat Water, Verkeer en Leefomgeving | 11200538-004 | 11200538-004-ZKS-0003 | 41 |

stroomgoot meten van de erosiegevoeligheid van de verschillende typen afzettingen onder invloed van stromend, sedimenthoudend, water.

Summary

In The Netherlands, as in many other countries, there is a strong need to be able to predict coastal evolution on a timescale of years-decades with reasonable certainty. This applies especially to future positions of tidal channels and tidal inlets, because these provide relevant information about the long-term stability of existing infrastructure and flood-defence systems, and hence also about expected maintenance costs. The numerical models that are currently used to predict coastal evolution function poorly for longer-timescales and one of the reasons for this is that the models do not differentiate between different types of deposits and hence cannot account for differential erodibility. Within the framework of the 'KPP B&O kust' program of Rijkswaterstaat-WVL a line of research was therefore initiated that has the overarching goal to improve the predictive power of hydromorphological models by incorporating geological information. The hypothesis herein is that erosion-resistant deposits will lead to relatively low migration rates and/or hinder deepening of the channel. An important knowledge hiatus is formed by an absence of information on the erodibility of the different types of deposits. A possible way to fill this hiatus is to use differences in migration rates of tidal channels to quantify the erodibility of different types of deposits. This report presents migration rates for tidal channels in The Netherlands based on shifts of the -6 and -15 m NAP contour lines between the period 1997-2002 and 2009-2014. These rates are compared to the general overview of the distribution of erosion-resistant deposits. To have a first check whether the observed patterns are consistent through time, the patterns are compared to the general patterns in migration of the thalwegs (deepest line of the channel) in the last decades.

From the analysis it can be concluded that 1) there are large variations in the average migration rate, partly explained by hydrodynamical processes, but especially in the Eems-Dollard-Groninger Wad region and the western Wadden Sea the relatively low migration rates are tentatively correlated to the presence of large patches of erosion-resistant deposits; 2) in the Scheldt-area there seems to be very little influence of erosion-resistant deposits on average migration rates, but it cannot be excluded that such deposits at the base of channels hinder deepening of the channel and 3) that a direct influence of erosion-resistant deposits on migration rates is not always easy to "prove" and that additional steps need to be taken in order to arrive at reliable erodibility-parameters for the different types of erosion-resistant deposits that can be used in numerical models. The most important steps are 1) an expansion of the current study to periods before 1997-2002 and with deeper contour lines, 2) an analysis of the profile of the channel walls since a staircase-profile is expected where the wall is contact with erosion-resistant deposits. Such sites should be focal areas in quantifying differential erodibility and 3) measuring the erodibility of different types of erosion-resistant deposits in a flume when exposed to flowing, sediment containing, water.

Contents

| | |
|---|-----------|
| 1 Introduction | 1 |
| 1.1 Background | 1 |
| 2 Erosion-resistant deposits and channel migration: a conceptual model | 3 |
| 3 Method to calculate average migration rates | 5 |
| 3.1 Contour-line migration | 5 |
| 3.2 Thalweg migration | 6 |
| 4 Results: migration rates | 7 |
| 4.1 Eems-Dollard-Groninger Wad | 7 |
| 4.2 Friesche Zeegat | 7 |
| 4.3 Borndiep inlet | 12 |
| 4.4 Vlie inlet and Eierlandse Gat | 12 |
| 4.5 Texel inlet | 16 |
| 4.6 Oosterschelde-Grevelingen | 18 |
| 4.7 Westerschelde | 18 |
| 5 Migration rates and geology | 23 |
| 5.1 Eems-Dollard-Groninger Wad | 23 |
| 5.2 Wadden Sea | 27 |
| 5.3 Zeeland | 32 |
| 5.4 Thalweg migraton during the last 30-90 years | 36 |
| 6 Conclusions | 39 |
| 7 Recommendations | 41 |
| References | 43 |

1 Introduction

1.1 Background

In The Netherlands, as in many other countries, there is a strong need to be able to predict coastal evolution on a timescale of years-decades with reasonable certainty. This applies especially to future positions of tidal channels and tidal inlets, because this provides relevant information about the long-term stability of existing infrastructure and flood-defence systems, and hence also about expected maintenance costs. In The Netherlands the position of the channels and the inlets is frequently monitored and this shows that these areas are highly dynamic. Apart for assessing the stability of infrastructure, the monitoring data is also used to create accurate navigation maps and to understand the Dutch coastal system, including erosion/sedimentation patterns and the exchange of sediment between the different tidal basins and the adjacent North Sea coastal zone.

At present predicting tidal-channel and tidal-inlet evolution is commonly done using hydromorphological models like Delft3D or its follow-up D-Flow FM. A current problem with these models is that they do not take the geological variation that exists in the subsurface in account and hence also not the differential erodibility that exists between different types of deposits. An example is that to all sediments a standard grain size is assigned, basically meaning that the subsurface is always schematised as consisting of the same type of sand. This limits the reliability of the outcome of the models, sometimes leading to clearly wrong predictions, especially if predictions are made for longer time periods and most likely especially in areas where erosion-resistant deposits are present. Within the framework of the 'KPP B&O kust' program of Rijkswaterstaat-WVL a line of research was therefore initiated that has the **overarching goal to improve the predictive power of hydromorphological models by incorporating geological information**. This is possible if different properties can be assigned to different types of sediment and that the spatial distribution of the different types of sediment can be incorporated as well. The line of research consists of four steps: 1) a map showing the spatial distribution of erosion-resistant deposits, 2) to study the relation between tidal-channel behaviour and erosion-resistant deposits, 3) to quantify the erodibility of different types of deposits and 4) to cooperate with hydromorphological modellers to implement this into their numerical models.

The first step was taken by the report of Hijma (2017a) that provided an overview of the presence, thickness and depth of such deposits in the subsurface along the Dutch shorelines. The report identified two main knowledge hiatuses that need to be filled to be able to take steps 2 and 3:

- 1 There is insufficient information on the regional build-up of the offshore subsurface;
- 2 There is insufficient information on the erodibility of the different types of deposits.

This first hiatus will not be filled quickly, since there currently is no organized regional mapping program of the offshore subsurface. Still, improvements can be made by making better use of existing data, especially geophysical data (Erkens et al., 2014), and by better organizing all the information produced by different projects for e.g. wind farms, sand mining or scientific research. Most value comes from the bigger projects, like the one recently carried out for identifying suitable offshore locations for sand mining (Blauw et al., 2017). The latter locations lie seaward of the Dutch coastal foundation, that currently has a seaward border along the -20 m NAP contour line, and hence seaward of the area with tidal channels, but the gathering of knowledge about the regional geological build-up has also added value for our understanding of the build-up of the coastal foundation and the connected tidal basins (Hijma, 2017b). In addition, a priority list should be made of tidal-inlet/tidal-channel systems for which there is not sufficient subsurface information. Prioritisation will most likely be based on a combination of coastal-zone management issues and our current understanding of the subsurface build-up. It makes sense to study areas that at least have the potential for erosion-resistant layers being present.

With respect to the second hiatus, this is also not easy to improve. There is currently hardly any quantitative information on the erodibility of the different deposits. According to Hijma (2017a) a proper literature review is needed, not only to gather relevant studies, but also to determine a useful method for direct measurements of erodibility. Another recommendation is to analyse the long-term migration rates of tidal channels in relation to the build-up of the subsurface. This information can potentially be used to assign long-term erodibility parameters to the different subsurface deposits and hence their influence on coastal evolution can be better understood. The study presented here follows from this last recommendation and helps in taken steps 2 and 3. **The specific goals of this study were to:**

- 1 develop a useful method to calculate the average migration rate of tidal channels;
- 2 make a first assessment of the relation between the migration rate of tidal channels and the subsurface deposits in which the channels are embedded. This first assessment was done by comparing bathymetric surveys from 1997-2002 and 2009-2014 and linking it to the overview of erosion-resistant deposits in Hijma (2017a). The hypothesis herein is that the presence of erosion-resistant layers will result in significantly lower migration rates of the channel walls or in hindering deepening of the channel.

The report starts with presenting a conceptual model of the influence that erosion-resistant deposits have on the migration rate and the planform of tidal channels, followed by describing the method that was used to calculate migration rates, the results and a discussion of the mentioned relation between migration rates and geology. It should be noted that the study was intended as a first step in quantifying the erodibility of different types of deposits based on bathymetric surveys and had corresponding time and budget associated to it. The discussion and analysis are therefore not exhaustive and not embedded within (inter)national literature. This and the analysis of average migration rates over other time periods could be part of a next phase in this line of research whereby the influence of geology on long-term coastal evolution is assessed and quantified.

2 Erosion-resistant deposits and channel migration: a conceptual model

In The Netherlands most tidal channels are migrating through a body of sand of varying grain size, shell content and percentage of fine material. Sometimes these channels migrate back and forth in a certain area, meaning that all sandy deposits within that area have been previously reworked. The differences in type of sand will result in differences in erodibility, but in general it is assumed that this will not lead to observable or relevant differences in the rate of migration. There are also areas, as outlined in Chapter 1, where erosion-resistant deposits are present that are expected to result in lower migration rates compared to channels where such deposits are absent. Apart from relatively low migration rates, the presence of the erosion-resistant deposit will also be reflected in distinctive channel profiles that are conceptualized in

Figure 2.1.

Panel A in that figure shows a typical channel profile of a tidal channel that is freely migrating through a body of sand. The shape is based on a visual check of channel profiles obtained from bathymetric data from the Wadden Sea. The degree of symmetry varies between channels and sections of channels, but their shared feature is that the channel walls are generally smooth. This changes when the channel wall gets in contact with erosion-resistant deposits (Panel B). This will result in a staircase-profile of the channel wall with steep sections where erosion-deposits are present and less steep sections where sand is present. At the vertical transition from the erosion-resistant deposit to the sandy deposit the difference in migration rate will often result in a plateau. An example of such a profile is given in Figure 2.2. If the erosion-resistant deposits are present at the base of the channel, this means that channel deepening is hindered. In general this will result in channel widening and the channel will have a distinctly different depth-width ratio.

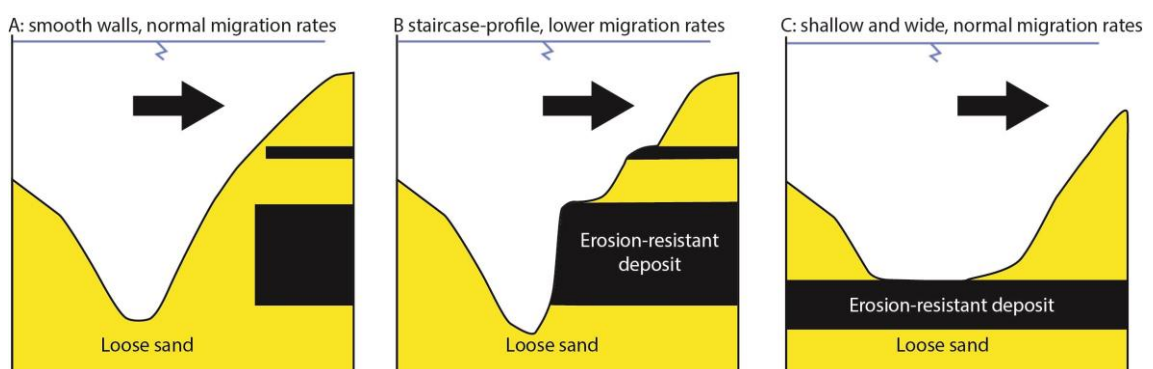


Figure 2.1 Conceptual model of the influence of erosion-resistant deposits on the shape of the channel profile.

Panel A shows a situation where the channel can migrate freely, resulting in profile with smooth channel walls. In Panel B one channel wall is in contact with erosion-resistant deposits resulting in a staircase-profile with steeper and less steep section and the presence of plateaux. In Panel C the erosion resistant deposit is present at the base of the channel, hereby preventing the channel from getting deeper easily and resulting in a channel that is relatively wide and shallow.

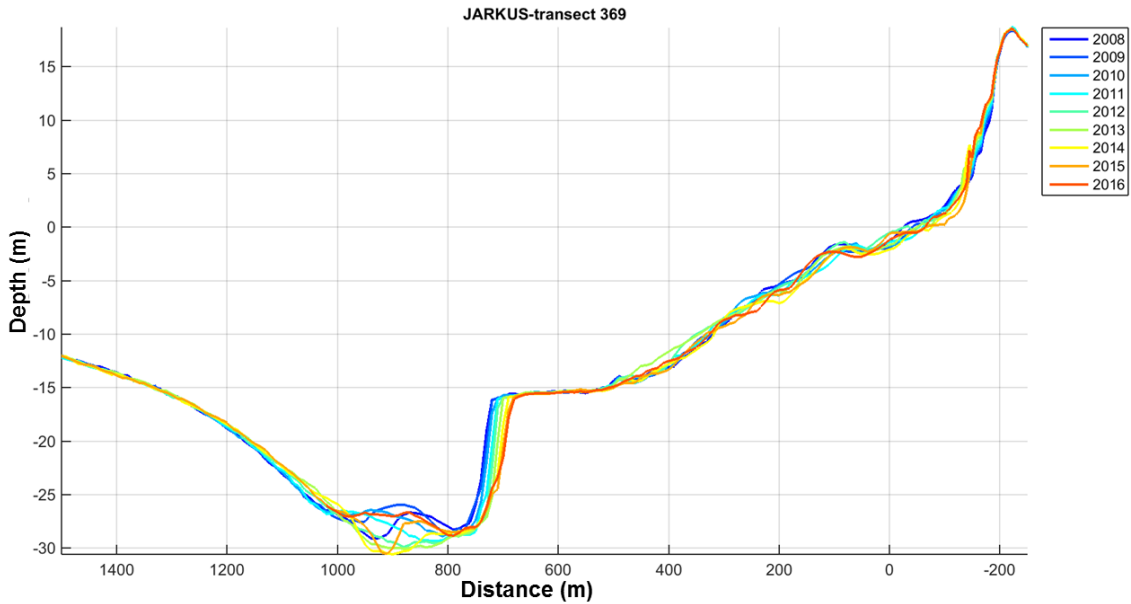


Figure 2.2 Channel profiles through time along a transect across the Nieuwe Schulpengat. On one side of the channel a clear staircase-profile is visible (see Figure 2.2, Panel B) that is attributed to the presence of erosion-resistant deposits.

3 Method to calculate average migration rates

To calculate migration rates of tidal channels a method was developed to calculate these rates based on the migration of contour lines. In addition to this, reconstructed thalwegs (Cleveringa en Geleynse, 2017) were used to obtain insight in the lateral migration of tidal channels over periods of several decennia. Below, first the new method is described, followed by a description of the thalwegs.

3.1 Contour-line migration

The bathymetric datasets that were used are based on the annual 'Vaklodingen' of Rijkswaterstaat. Each year different parts of the shoreface and the tidal basins are surveyed and interpolated to a raster with 20x20 m resolution. To create a complete bathymetric map it is necessary to mosaic several rasters to one raster whereby it is common practice that the most recent data trumps older data, meaning that the resulting map displays the most recent data from the used raster series. For this study we compared mosaicked maps from the periods 1997-2002 with 2009-2014. The data from these periods is of good quality and a period of about 12 years is sufficient to see migration of the tidal channels. From these two mosaicked maps contour lines for -6 m and -15 m NAP were extracted (Figure 3.1). These two contour lines were chosen to be able to analyse the migration of both the smaller and the bigger tidal channels. They are arbitrary in the sense that one could also have used contour lines of -5 m and -14 m NAP, but such differences are considered irrelevant since they will not influence the insights that are provided by the present study. One could have also used many more contour lines, to have a higher chance of capturing the depth at which erosion-resistant deposits are present, but for practical reason this was not feasible and also not necessary to reach the two goals of the study.

The migration distance was obtained by creating points in ArcGIS on the contour lines of the period 2009-2014. This was only done for contour lines that shifted due to erosion, not for contour-line shifts due to sedimentation. The distinction between migration through erosion versus sedimentation was done visually and based on the visible migration pattern. In a next step the distance between the points and the contour line of the period 1997-2002 was calculated with ArcGIS. In a final step the average migration rate for each point was calculated by dividing the distance by the number of years between the two compared bathymetric surveys. Since mosaicked rasters from two periods were compared, this means that the number of years can vary. The average number of years between the rasters is 11.7 year, while the minimum is 8 and the maximum is 15 year.

The uncertainty around the calculated migration rates is mostly depended on the vertical accuracy of the bathymetric measurements (estimated to be ± 0.25 m, 2σ) and the slope of the channel wall. To estimate the uncertainty, 8 channel walls were graphically plotted by extracting bathymetric data from ArcGIS. In these profiles each centre of a raster cell is a datapoint on the profile line. By adding or subtracting 0.25 m from the value of each raster cell, the 95% range in slope angles is determined. From this the 95% range in horizontal position of the contour line can be calculated. For the 8 channel walls the possible range in horizontal position of the contour line, relative to the mean position, was ± 2 and ± 12 m with an average of ± 7 m. This latter range was used for estimating the uncertainty around the measured distance between contour line.

As an example let's assume that the measured distance between two contour lines is 30 m. When normally distributed, the standard deviation around the measured distance will be ± 9.9 m (square root of 7^2+7^2). To calculate the average migration rate 30 ± 9.9 m has to be divided by the number of years passed between the bathymetric surveys, 12 years in this case. The migration rate is then calculated by dividing 30 ± 9.9 by 12 ± 0.5 resulting in an average migration rate of 2.5 ± 0.8 m/yr. The standard deviation of ± 0.8 m/yr is independent of the measured distance and the number of years. To avoid misguided conclusions about the spatial pattern in average migration rates only migration rates higher than 0.8 m/yr are labelled significant in this study and displayed in the maps.

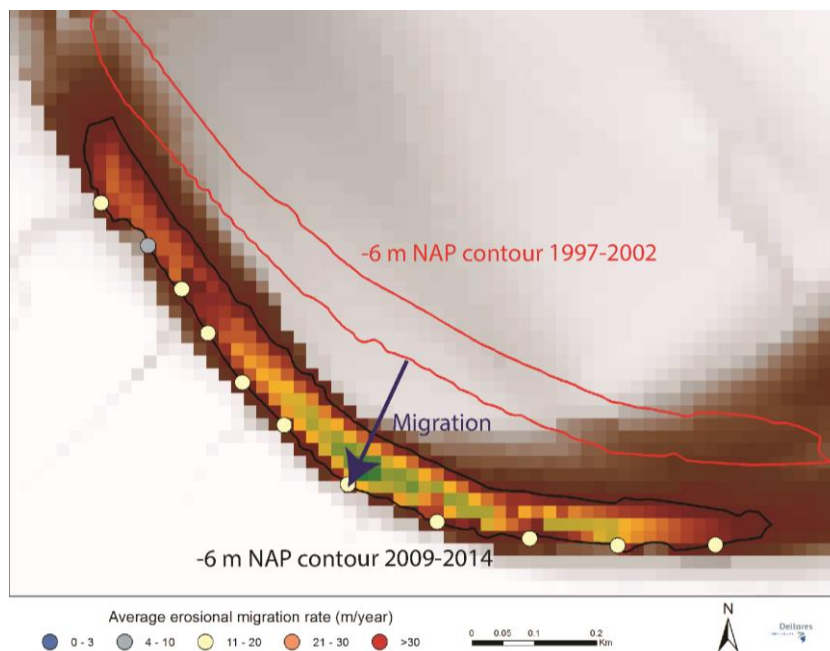


Figure 3.1 Example of the method used. Two contour lines are displayed: one from the period 1997-2002 (red) and one from the period 2009-2014 (black). On the 2009-2014 contour line points are created and the distance between the points and the 1997-2002 contour line is calculated (220 ± 9.9 m in this case). The average migration rate is then calculated by dividing the distance by the elapsed time (12 ± 0.5 years in this case), resulting in an average migration rate of 18 ± 0.8 m/year.

3.2 Thalweg migration

The thalweg of a channel is the line of lowest elevation within the channel. The word itself is German and means “way through the valley”. Recently a report by Arcadis (Cleveringa en Geleynse, 2017) was published alongside hand-drawn shapefiles of the position of the thalweg of tidal channels in The Netherlands. For some tidal channels the oldest map used dates from 1983, while for other channels data from 1926 were available. We used their data to give an impression of the pattern of lateral migration of the tidal channels during the last decades, so over longer periods than analysed in this study, and to compare that pattern with the presented pattern in the current report. The Arcadis report itself does not discuss the observed patterns. We did not calculate lateral migration rates from the Arcadis shapefiles, because 1) the focus of the current report lies on the migration of channel walls since that is considered to be the most indicative for an influence of erosion-resistant layers and 2) the uncertainty around the thalweg reconstructions is relatively large and should, according to Cleveringa en Geleynse (2017), be quantitatively validated.

4 Results: migration rates

This chapter provides an overview of the migration rates for different regions along the coast, without looking at the influence of the geological situation. Figures with the same geographical extent will be shown in Chapter 4, but then including the mapped distribution of the erosion-resistant deposits (Hijma, 2017a). The numbers in bold refer to locations on the maps. For some areas topographic maps are included to facilitate reference.

4.1 Eems-Dollard-Groninger Wad

The Dollard-area is quite shallow and no -15 m NAP contour lines are present (Figure 4.1). The main channel system of the Dollard (Mond van de Dollard-Groote Gat) widened at the -6 m level, at some places considerably with rates of 21-30 m/yr (1). This widening trend at the -6 m level is visible all the way north up to the Eemshaven-area, since at both sides of the Eems erosion has occurred (2, 3). The highest rates are found on the eastern side, just north of the bend in the Eems, where the -6 m contour line has migrated 300-400 m at several places (3). At present it is unclear whether this is related to human activities (dredging) or not.

In the area where the Eems bends north the estuary is deep and reaches below -15 m. In general the deepest parts have shifted towards the east with relatively low rates of 2-5 m/yr (4). Also in front of the Eemshaven the estuary is deep, most likely due to dredging. The deepest parts have widened on both sides with rates as high as 20 m/yr, but on average about 5 m/yr (5). Seaward of the Eemshaven area (Figure 4.2), the east side of the main channel (Westereems) shows erosion at several places with the highest rates in the ebb-tidal delta area (6). The west side shows little erosion, except directly north of Rottumeroog where strong erosion occurred, on average with rates of 25 m/yr, but with maximum rates of 40 m/yr (7). In many places the -15 m contour line expanded on both sides of the deepest parts of the Westereems, meaning that the deepest parts have increased considerably in area (8).

The tidal channels west and east of Rottumerplaat (Figure 4.3) have migrated over large distances (Figure 4.2). In between Rottumerplaat and Rottumeroog the channel shifted east with rates of 6-20 m/yr (9), but especially the channels Eilanderbalg and Spruit in between Rottumerplaat and Schiermonnikoog have been very active with rates higher than 30 m/yr being the norm (10). At the southern end of the large system (Zuid Oost Lauwers) migration rates drop sharply (11). Most of the channels are shallower than -15 m, but in the small part of the Zuid Oost Lauwers that is deeper than -15 m NAP migration rates are high (12).

4.2 Friesche Zeegat

In the ebb-tidal delta area of the largest channel system, Westgat-Zoutkamperlaag (Figure 4.3), the main flow shifted to the northwest, resulting in a large expansion of the area below -6 m (13) and with average erosion rates above 30 m/yr (Figure 4.5). South of the Engelmansplaat this channel system migrated towards the west with rates of mostly 4-10 m/yr (14). At its landward end erosion rates drop to an average of 3 m/yr (15). The area of the Westgat-Zoutkamperlaag that is deeper than -15 m is small and located in the middle of its largest bend (16). This area shifted westward with rates of 4-20 m/yr.

The channel system directly south of Schiermonnikoog, het Gat van Schiermonnikoog, migrated with rates of 11-20 m/yr in its western part (17) and with lower rates, 1-10 m/yr, in its eastern part (18). In the Pinkegat area, directly east of Ameland, the highest rates lie close to 20 m/yr, but average rates are in the order of 6-12 m/yr (19).

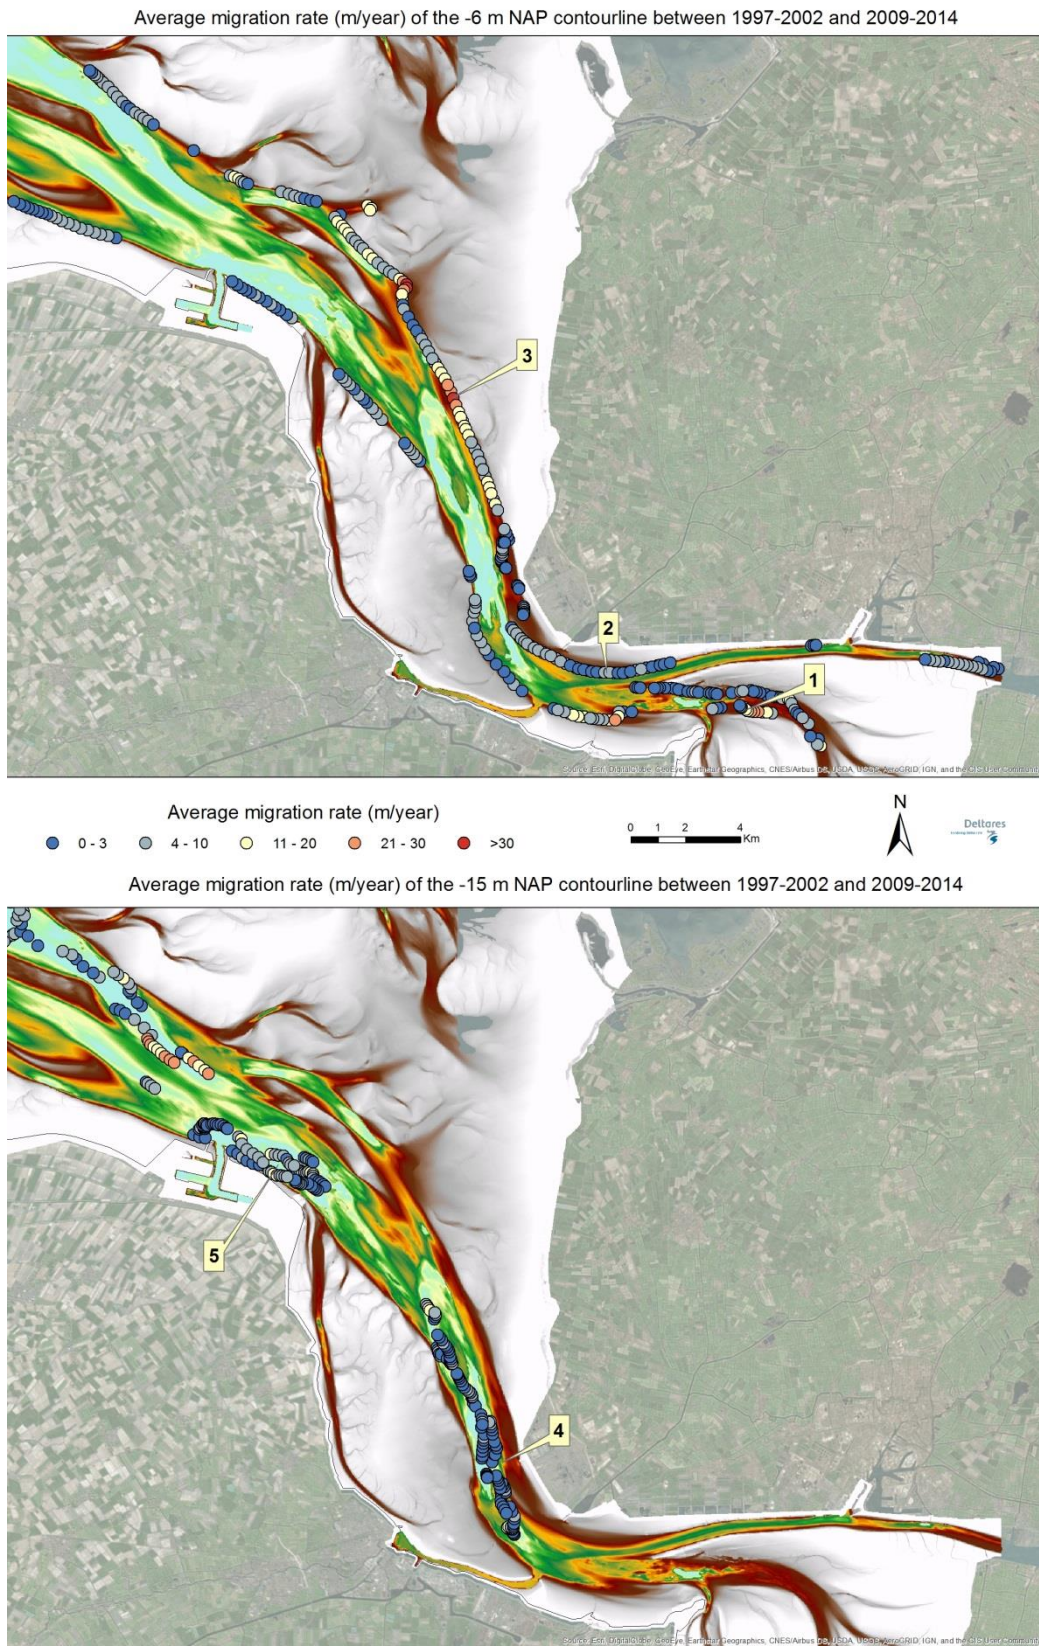


Figure 4.1 Average migration rates for the southern Eems-Dollard region between 1997-2002 and 2009-2014.

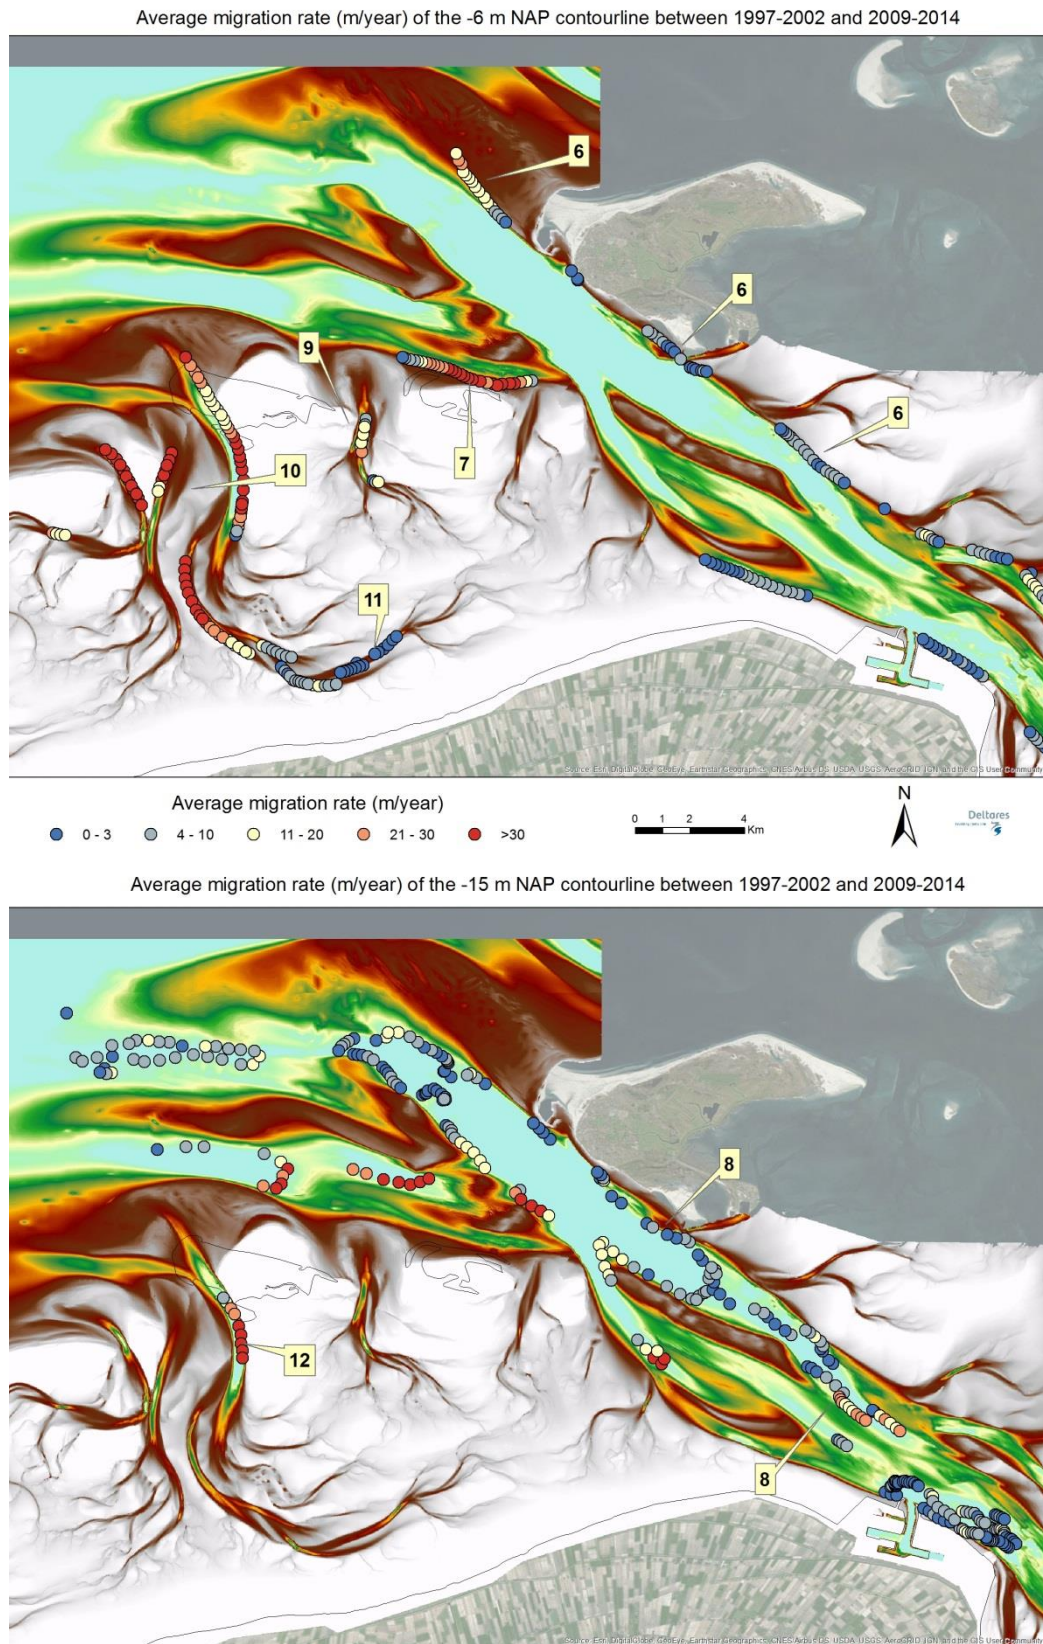


Figure 4.2 Average migration rates for the mouth of the Eems estuary and the Groninger Wad between 1997-2002 and 2009-2014.

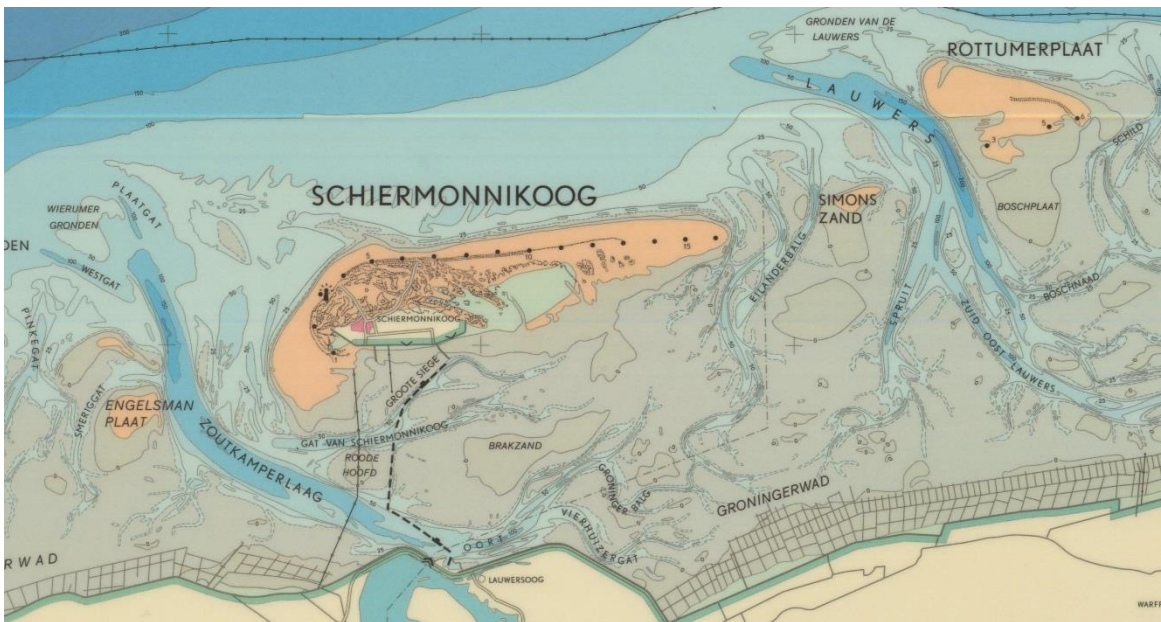


Figure 4.3 Map of the Friesche Zeegat and the Groninger Wad.

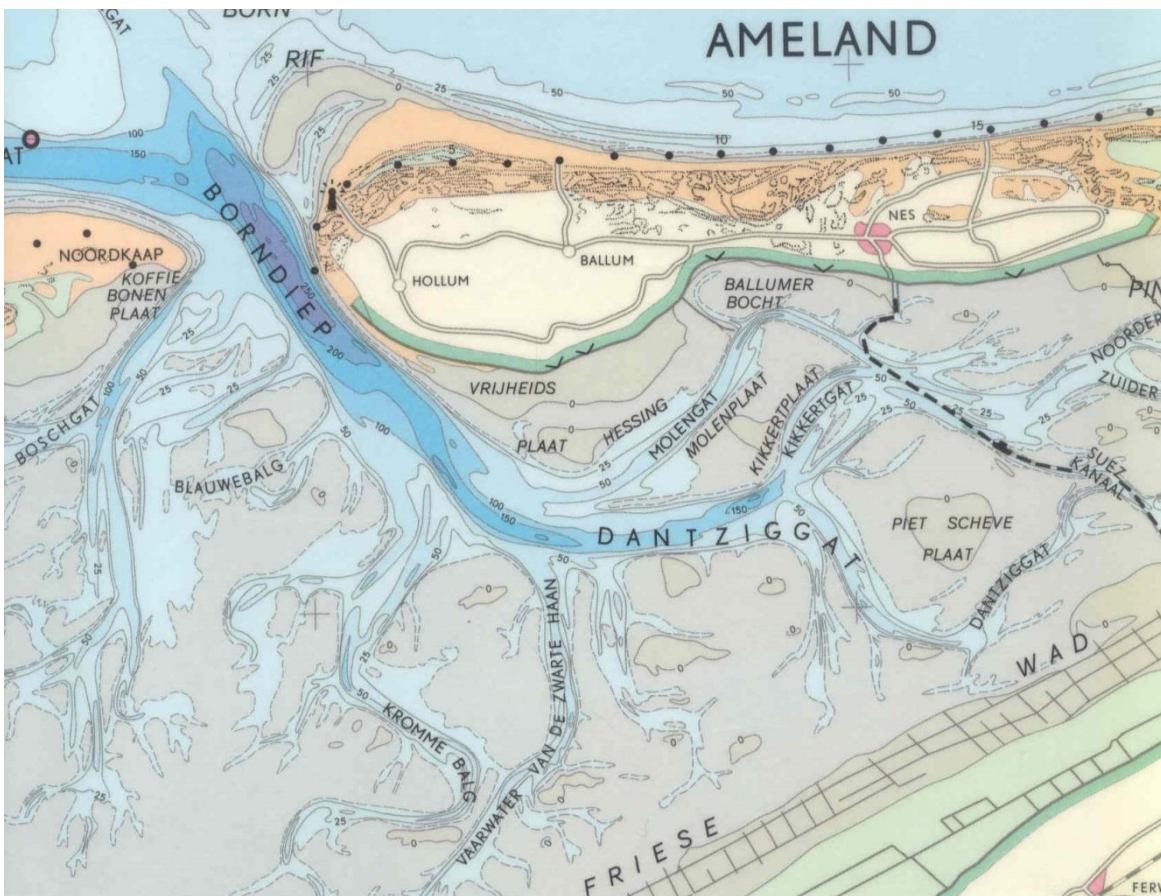


Figure 4.4 Map of the Borndiep inlet.

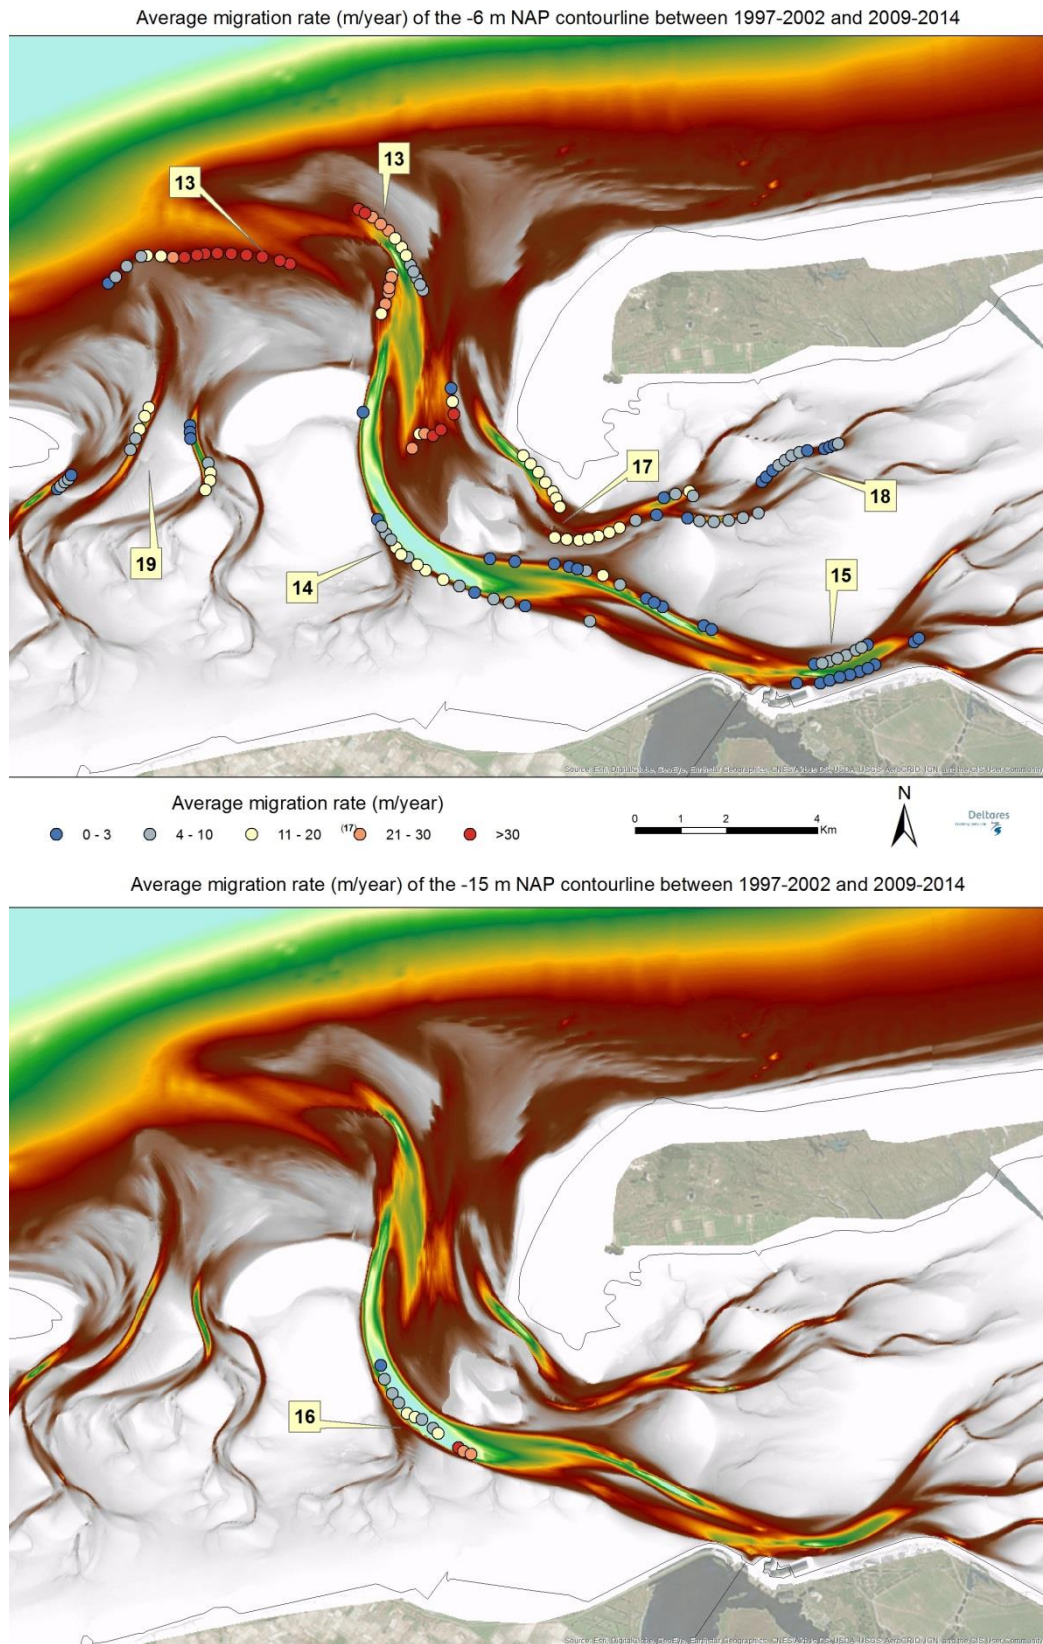


Figure 4.5 Average migration rates for the Friesche Zeegat between 1997-2002 and 2009-2014.

4.3 Borndiep inlet

The main channel in this inlet is the Borndiep that branches off in several directions (Figure 4.4, Figure 4.6). At the tip of Ameland the -6 m area has expanded on both sides with about 1-5 m/yr (20). Similar migration rates, but mostly on the western side, can be seen for the -15 m contour line (21). South of Ameland the Borndiep has widened considerably, especially on its eastern side, with average rates of 15 m/yr (22). Because migration due to sedimentation is not analysed it is not visible in the figure, but the area deeper than -15 m decreased considerably in surface area south of Ameland (23). High migration rates are calculated for the most southern end of the area below -15 m (24).

The direct extension of the Borndiep, the Dantziggat, shows relatively high average migration of 12 m/yr (25), while the small channel directly south Ameland, the Molengat, was rather stable (26). The other small channels in the eastern part show high migration rates, in the order of 3-13 m/yr, possibly influenced by maintenance of the navigation route between Holwerd and Ameland (27). The southwestern branch of the Borndiep shifted towards the west with rates of 3-15 m/yr (28). Finally, the channel southeast of Terschelling, the Blauwe Balg, shifted considerably toward the east with rates up to 45 m/yr, but with average rates around 25-30 m/yr (29).

4.4 Vlie inlet and Eierlandse Gat

The Vlie inlet (Figure 4.7, Figure 4.8) is dominated by the Vliestroom (30, 32) that branches towards the east (Westmeep, 31). Large parts of the Vliestroom are deeper than -15 m. Directly south of the tip of Terschelling the channel migrated northward with rates of 2-10 m/yr (33), while to the south the channel migrated mainly westward but with similar rates (34). The northernmost bend in the Noordmeep migrated north with rates as high as 20 m/yr, but commonly with rates between 1-8 m/yr (35). The deep part in the Boomkensdiep migrated over 500 m towards the south (36), while the deep part of the Schuitengat remained rather stable (37). The western part of the Zuiderstortemelk, north of Vlieland, moved towards the south (38), while the eastern part shifted a little northward (39).

When all shifts of the -6 m contour line are averaged, this results in a rate of 4-5 m/yr, with a largest rate of 26 m/yr. Compared to the channel systems described in paragraphs 3.1-3.3 channel migration rates do not decrease visibly towards their landward ends. In contrast, several of them, e.g. the Oostmeep (40) and the navigation channel to Harlingen (41), show high migration rates in their eastern part. The navigation channel is obviously maintained, so the observed migration is likely strongly influenced by human activities. Most systems show erosion on one side, signifying migration, but some show erosion on both sides, signifying widening. This latter is e.g. true for the Noorderbalgen (42), the Vliestroom and parts of the navigation channels towards Harlingen. The most dynamic areas consist of the area north of the Richel (43), the area directly south of the point where the navigation channel meets the Vliestroom (44), the north side of the Noordmeep (45) and the eastern end of the Oostmeep (40).

The Eierlandse or Engelsman Gat, the inlet between Texel and Vlieland is rather small and contains no parts deeper than -15 m. Near the tip of Vlieland migration rates are relatively high with an average of 13-15 m/yr (46). Further eastward, erosion rates drop to an average of 3 m/yr (47). In many places erosion occurred on both sides, meaning that at those locations the channels have widened.

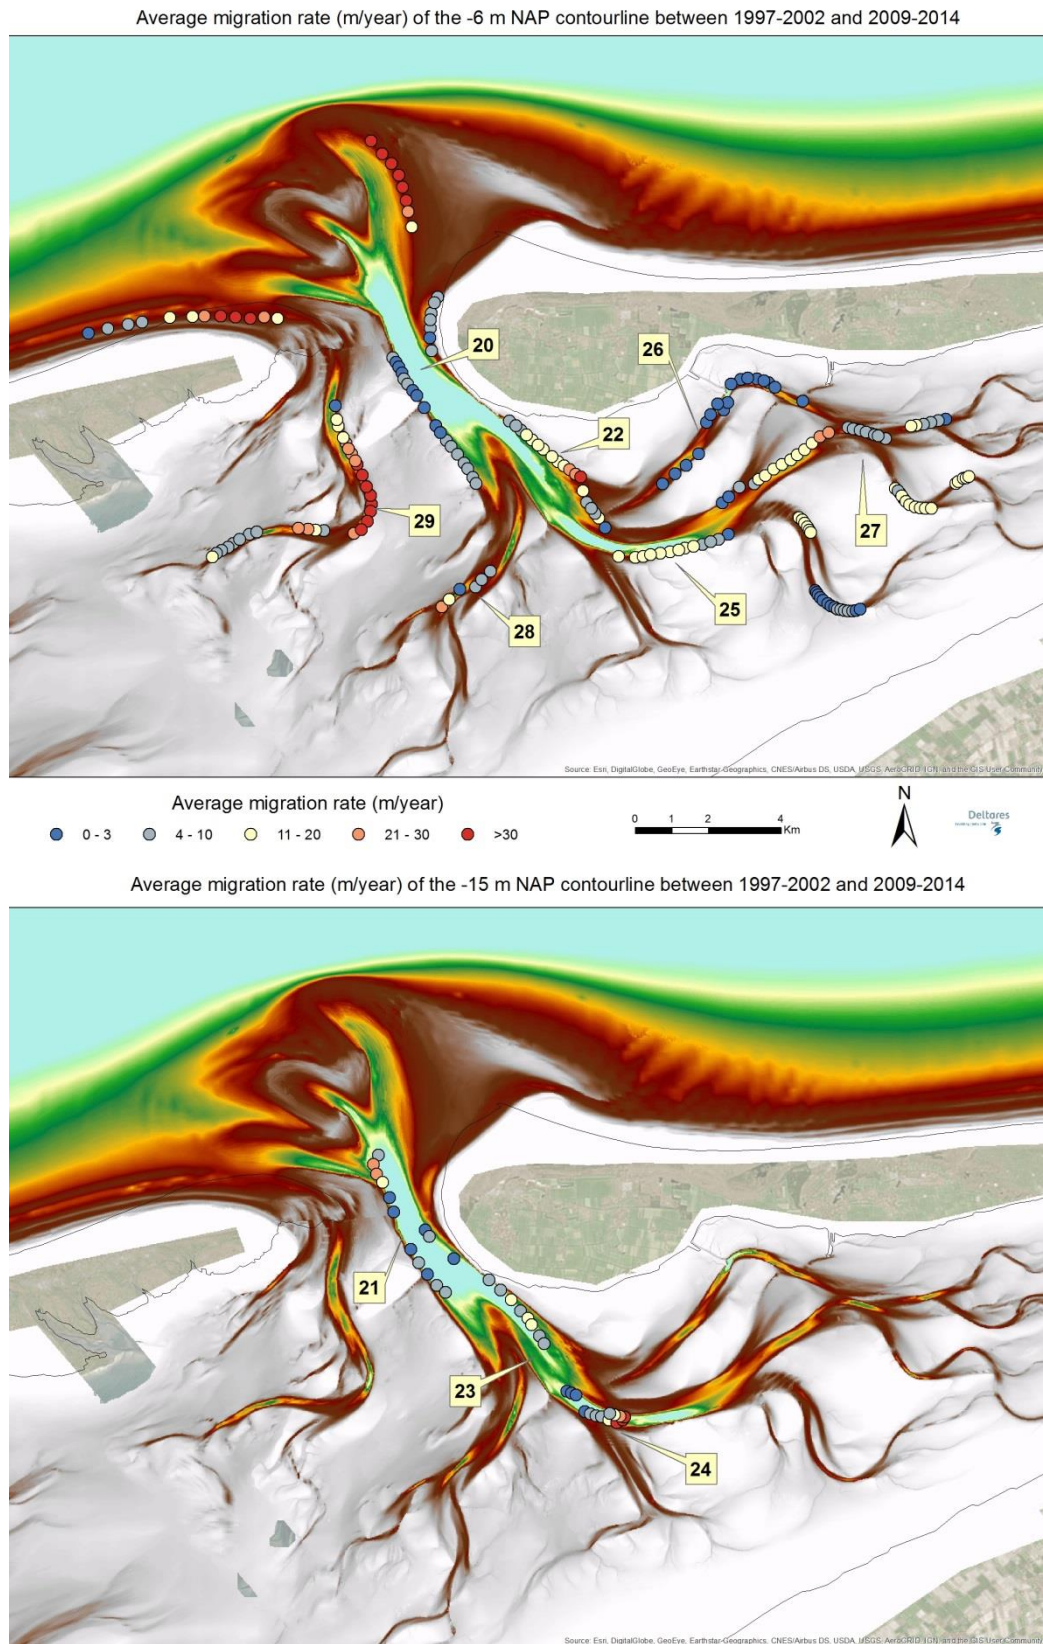


Figure 4.6 Average migration rates for the Borndiep inlet between 1997-2002 and 2009-2014.



Figure 4.7 Map of the Vlie inlet and Eierlandsche Gat

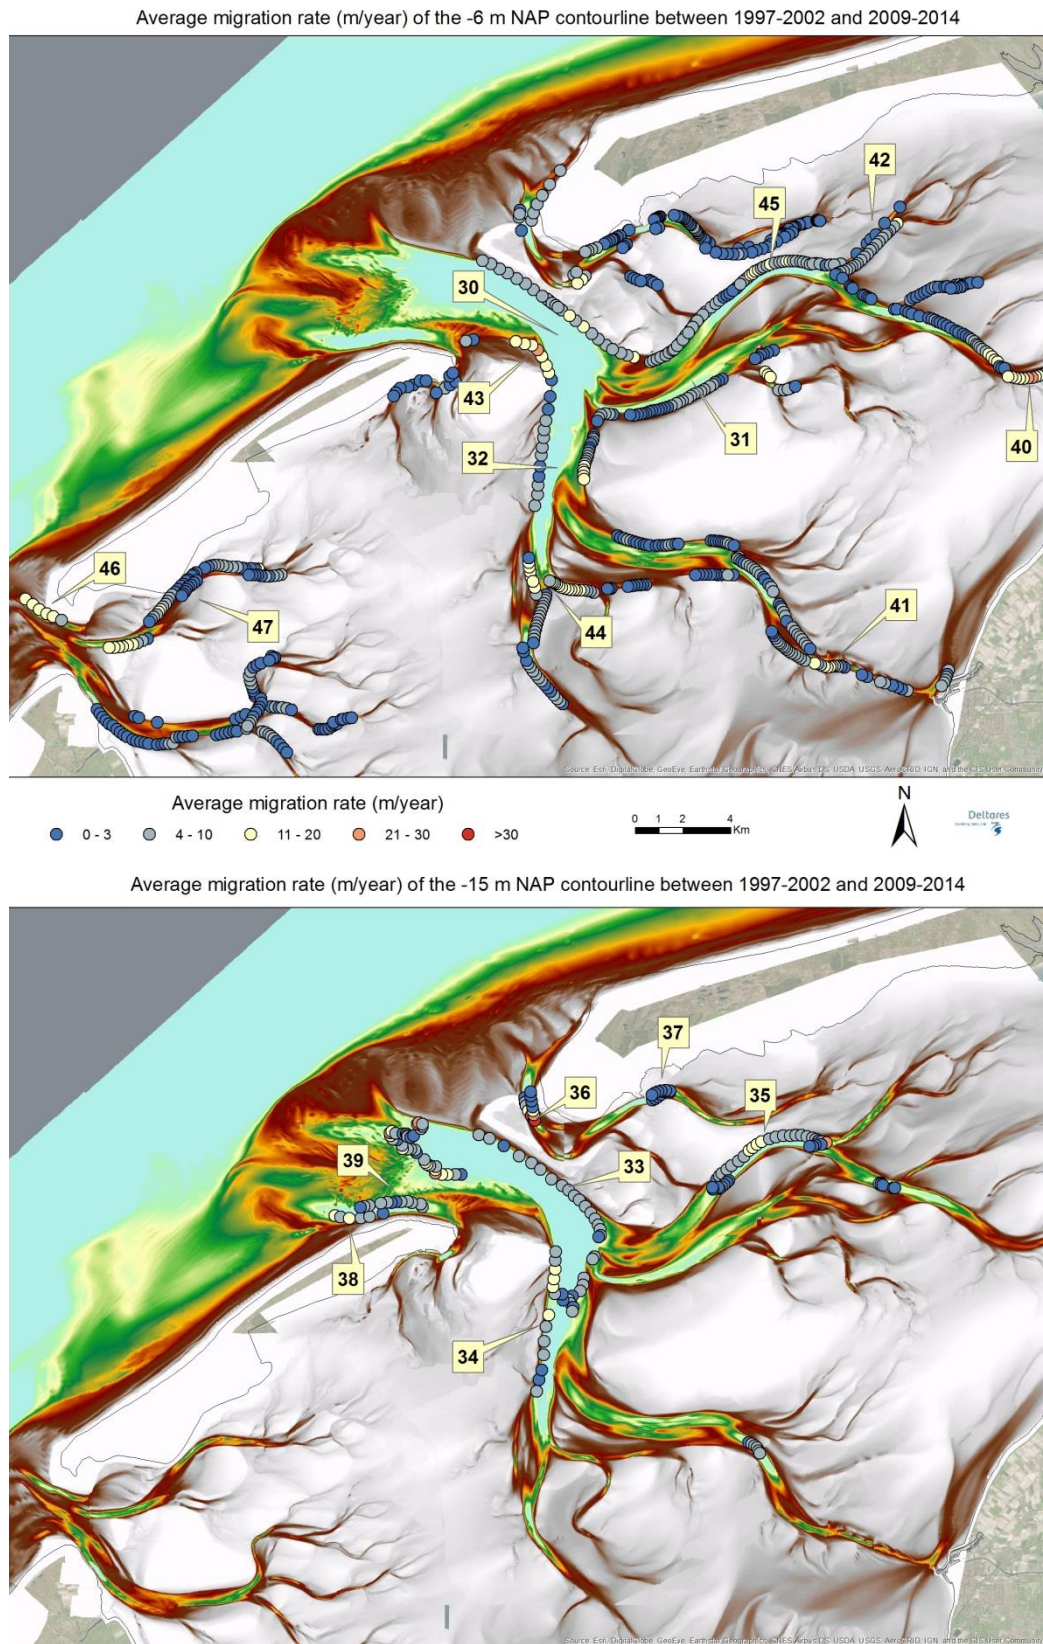


Figure 4.8 Average migration rates for the Vlie-Eierlandsche Gat between 1997-2002 and 2009-2014.

4.5 Texel inlet

The Marsdiep-Textelstroom system (48) is very large and for a large part deeper than -15 m (Figure 4.9, Figure 4.10). From its western end until the point where the channel starts to bend eastward the -15 m contour line shifted on both sides of the channel. Migration rates are commonly only a few m/yr, partly due revetments in areas where the channel edge lies close to the main land, e.g. around the tip of North-Holland and along Texel. The smaller pockets with deep water near the start of the Doove Balg (49) and also in the Malzwin (50), migrated in an easterly direction. Offshore the Nieuwe Schulpengat shifted landward with average rates of 8 m/yr, but in its southern part rates are as high as 16 m/yr (51).

Concerning the -6 m contour line it is clear that migration rates commonly are 1-5 m/yr. More active areas are found along the northernmost part of the Texelstroom (52), near the landward end of the Omdraai-Oude Vlie (53), in the Vogelzand-Burgzand area (54) and in the Doove Balg (55). Relatively high rates of migration are also found southwest of Kornwerderzand (56).

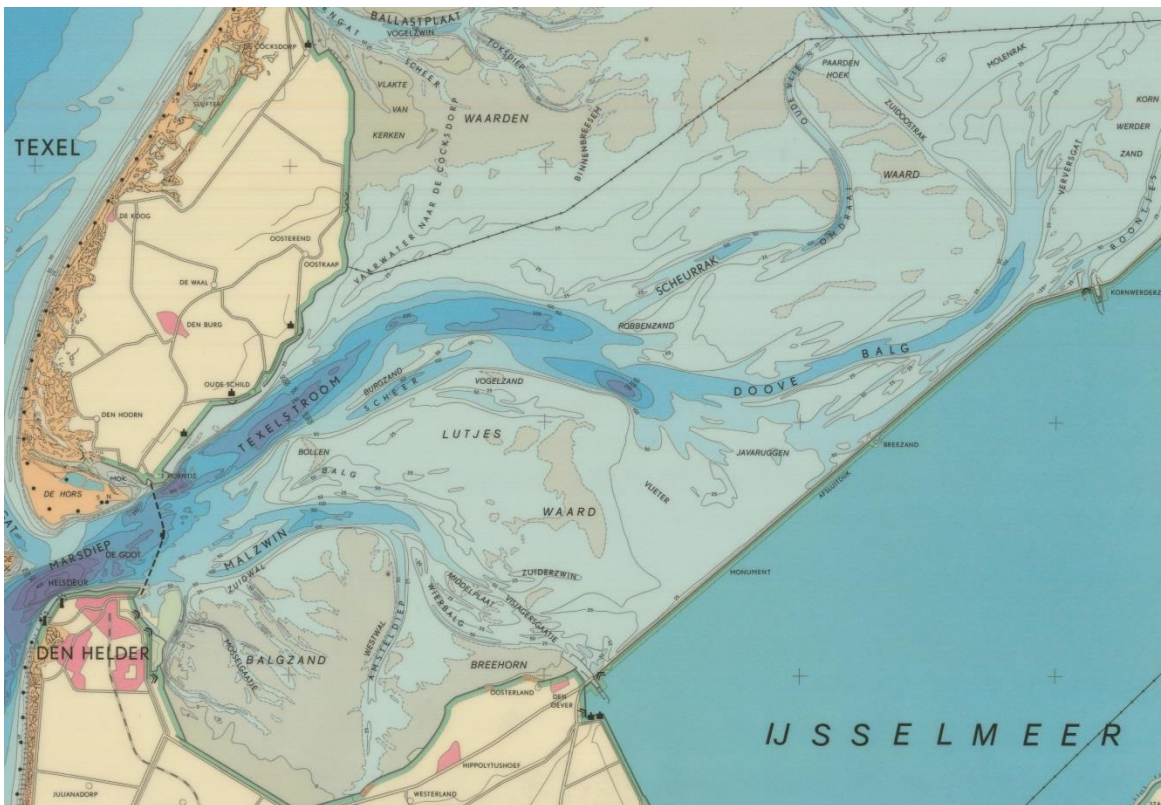


Figure 4.9 Map of the Texel inlet

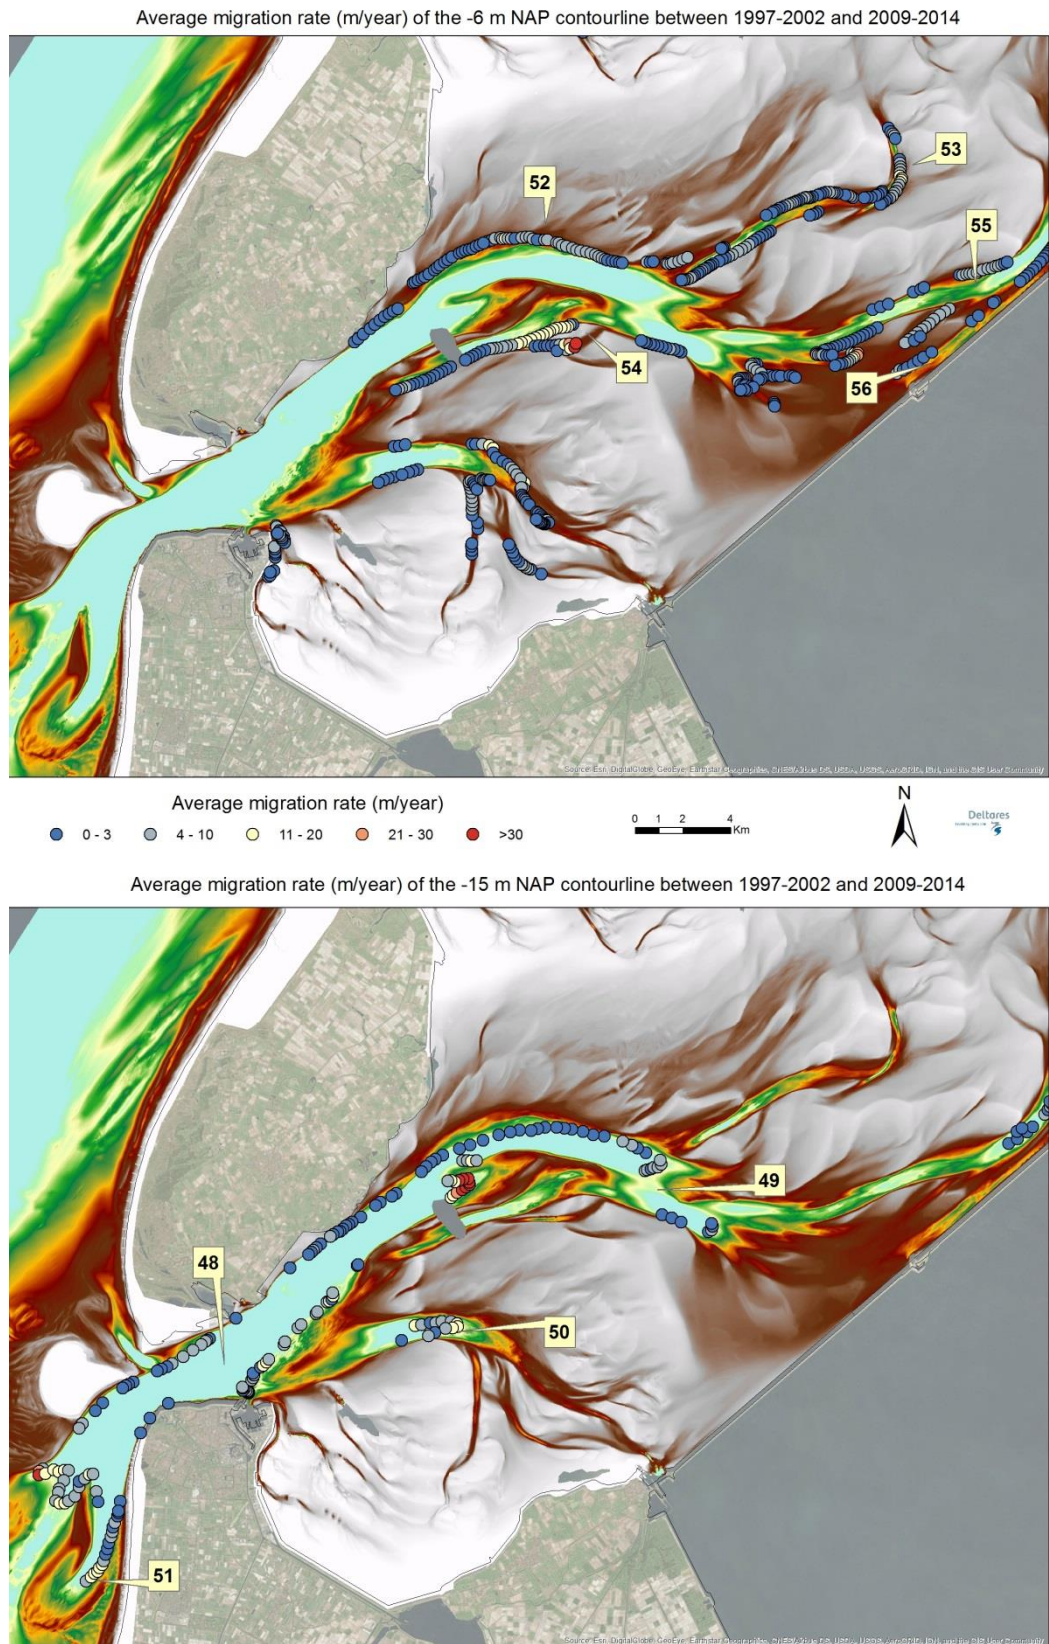


Figure 4.10 Average migration rates for the Texel inlet between 1997-2002 and 2009-2014.

4.6 Oosterschelde-Grevelingen

There are hardly any erosional patterns visible along the -15 m contour line (Figure 4.11), except for some offshore pockets that have shifted (57). The shifts in the -6 m contour line show that the offshore shoals are eroding rapidly at several places. While several shoals are eroding on one side only, like north of the Brouwershavensche Gat (58) and the shoals Hompels (59) and Noordland (60), the Banjaard (61) is eroding on all sides with average rates of 25 m/yr and with maximum rates of ~60 m/yr. The Krabbengat (62) along the tip of Schouwen has widened slightly. The channels in the closed-off Grevelingen did not migrate due to the absence of tidal currents, but also in the Oosterschelde estuary the channels, especially their deeper parts, show little migration.

4.7 Westerschelde

The mouth of the Westerschelde contains an important, deep and heavily managed navigation channel towards the estuary entrance and the harbour of Antwerp (Figure 4.12). Several parts are maintained by dredging and hence observed migration patterns are certainly not only the result of natural processes.

The Wielingen channel (63), along the south side of the Vlakte van de Raan (67), shows a relatively stable -15 m contour line although at several places erosion rates reach 5-10 m/yr. The channel along the tip of Walcheren, the Oostgat (64), has been stable, except for an expansion of the deeper part of the channel towards the north. The stability is predominantly the result of a sand nourishment of almost 10 Mm³. The -6 m contour line indicates relatively strong migration rates of the shallower shoals in the outer delta area. West of the Oostgat, the Bankje van Zouteland (65) and the Deurloo (66) mostly migrated towards the east with rates of 5-15 m/yr, but at some place with more than 20 m/yr. The highest part of the Vlakte of the Raan was strongly eroded on several sides (67).

The channels in the Westerschelde estuary (Figure 3.9) show significant shifts of both the -15 m and the -6 m contour line, except for areas where the channel lies very close to the shoreline and migration is prevented by revetments. The highest rates for the -15 m contour line can be found in the Everingen-Middelplaat region (3-26 m/yr, 68), along the Platen van Hulst (5-28 m/yr, 69) and the east side of the Zuidergat (4-24 m/yr, 70). Also the -6 m contour line shifted considerably in the Everingen-Middelplaat region (4-30 m/yr), but also along the east side of the Pas van Borssele (10-15 m/yr, 71), the Platen van Ossensisse (8-20 /yr, 72) and the southeast side of the Plaat van Walsoorden (8-20 m/yr, 73) migration rates were high.


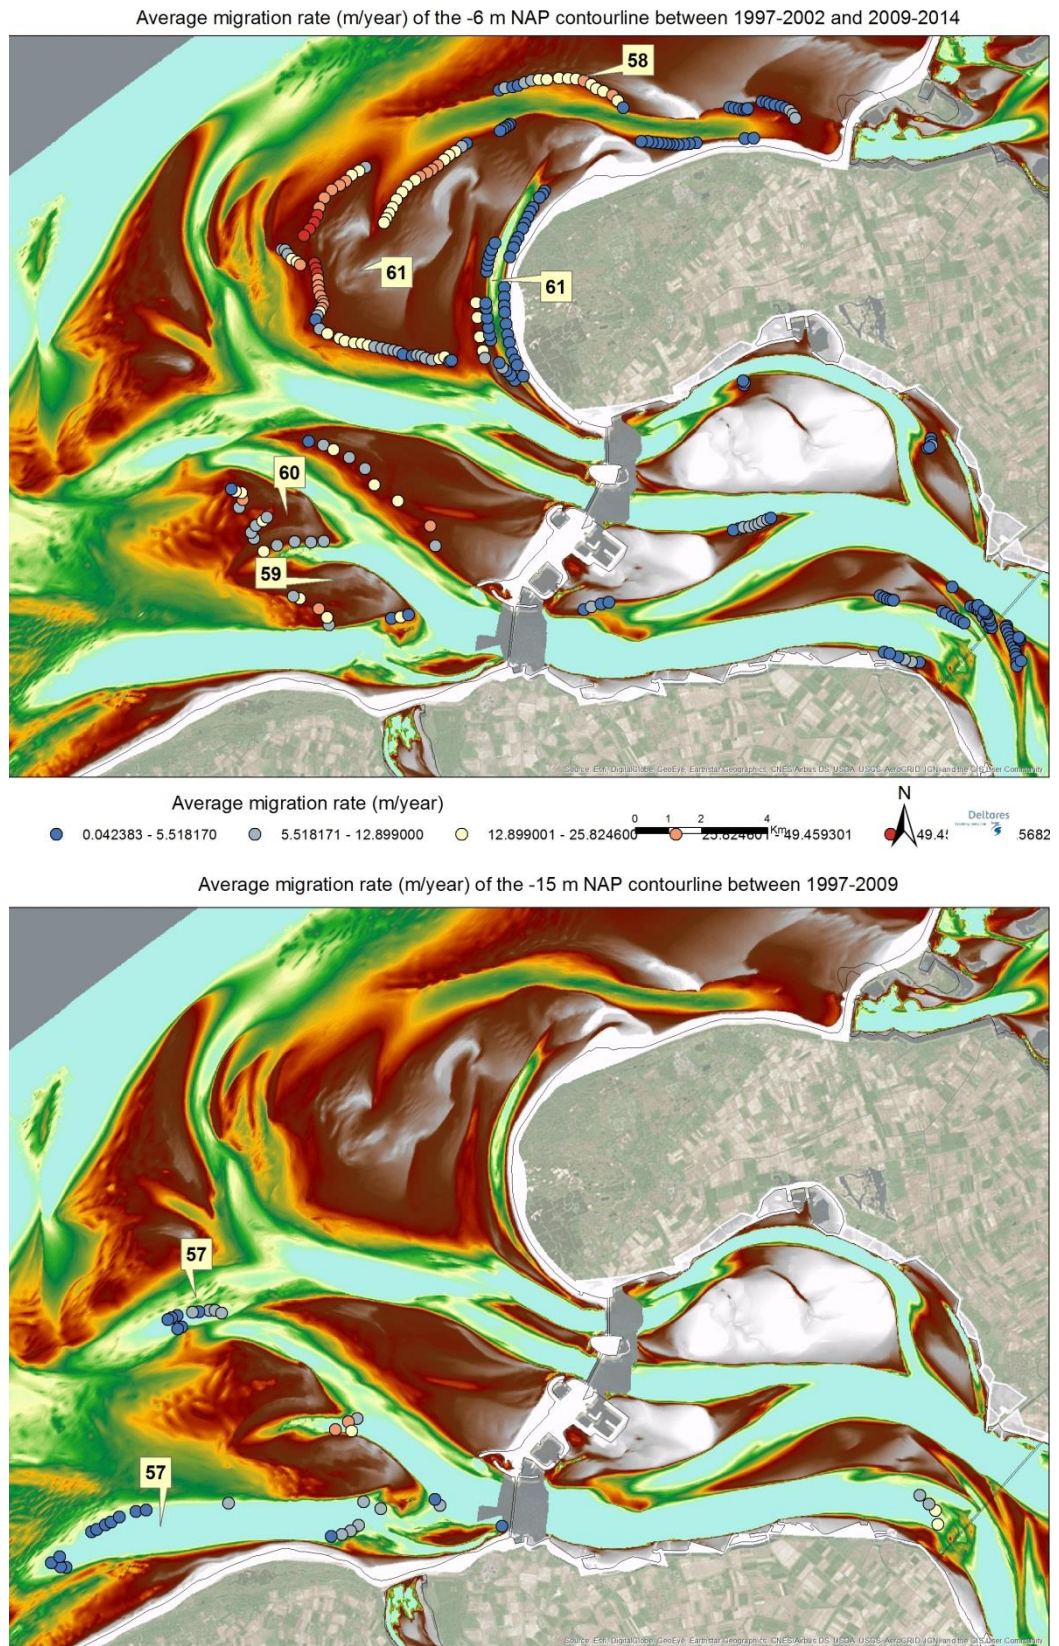


Figure 4.11 Average migration rates for the Oosterschelde-Grevelingen region between 1997-2002 and 2009-2014.

Average migration rate (m/year) of the -6 m NAP contourline between 1997-2002 and 2009-2014

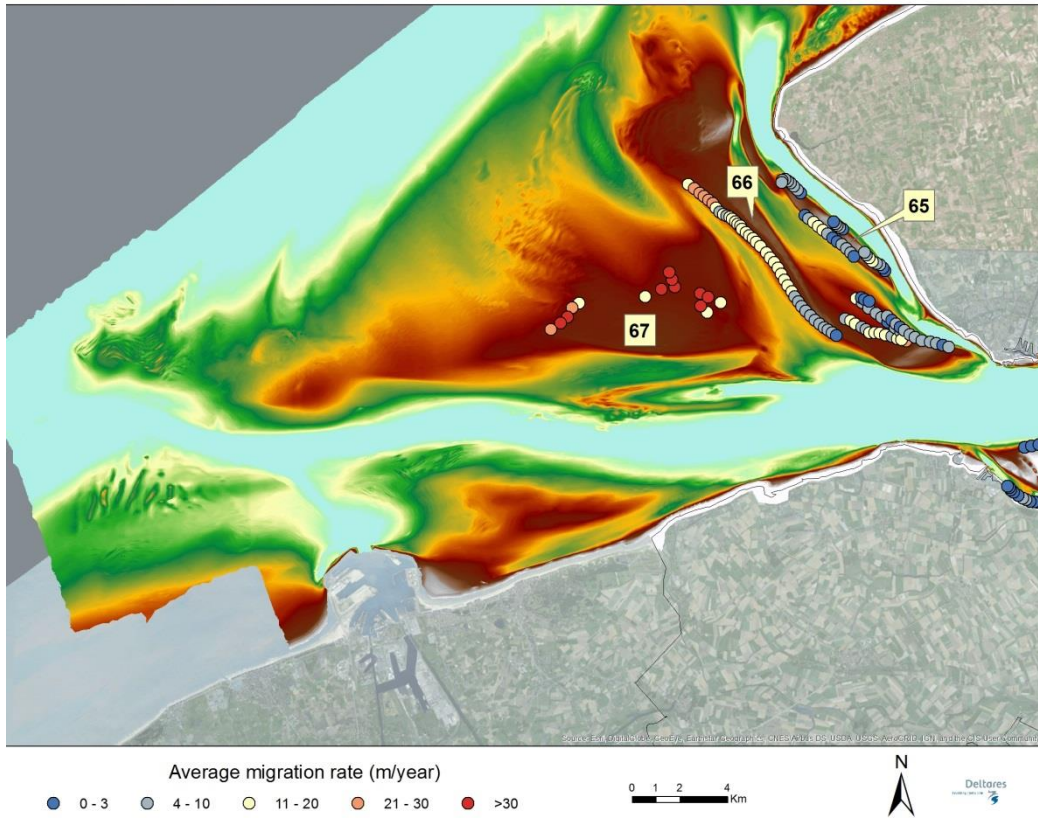

Average migration rate (m/year) of the -15 m NAP contourline between 1997-2002 and 2009-2014

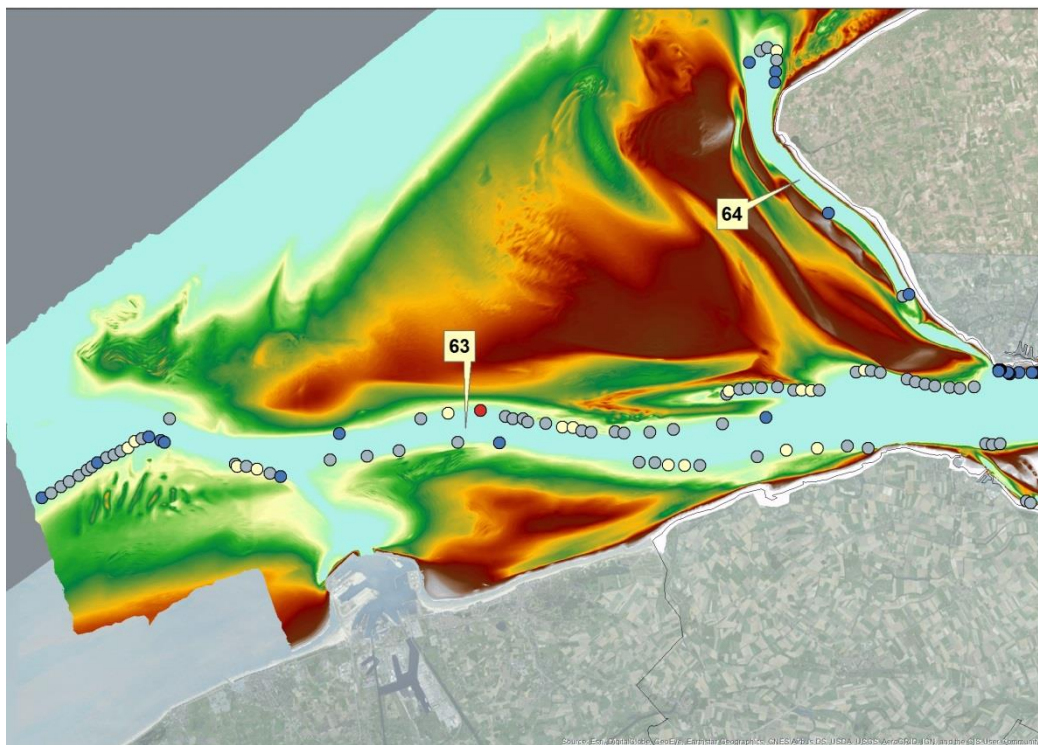


Figure 4.12 Average migration rates for the mouth of the Westerschelde between 1997-2002 and 2009-2014.

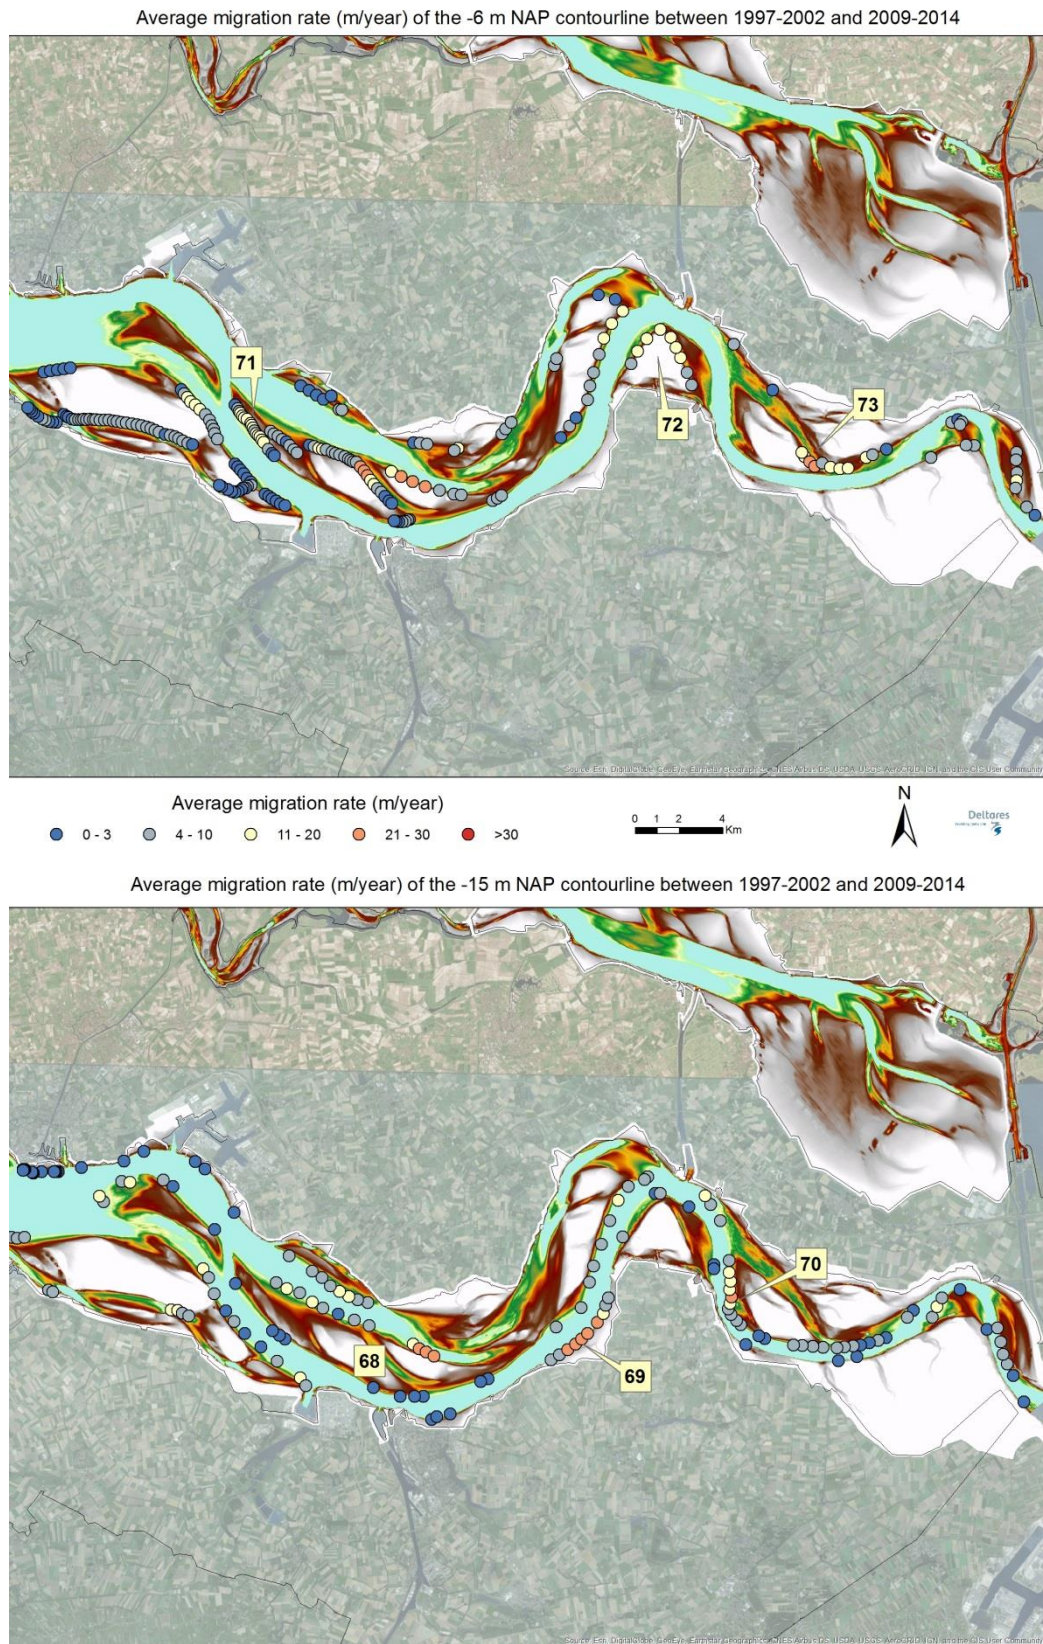


Figure 4.13 Average migration rates for the Westerschelde estuary between 1997-2002 and 2009-2014.

5 Migration rates and geology

The figures below show the calculated migration rates together with the area where erosion-resistant deposits are most likely present. The numbering of the areas with these deposits corresponds with the numbering in Hijma (2017a). Below the relation between these deposits and migration rates is explored for three regions: Eems-Dollard-Rottumerplaat, Wadden Sea and Zeeland, followed by an analysis of thalweg migration over longer periods of time.

5.1 Eems-Dollard-Groninger Wad

In this region the erosion-resistant deposits consist of Holocene clay and peat layers, and Pleistocene till and Potclay (Figure 5.1; Figure 5.4). The Pleistocene deposits commonly lie deeper than -6 m NAP, only in geological area 29 there is a small chance that Potclay occurs shallower. This means that it are Holocene peat and clay layers that are relevant for the migration rate of the -6 m contour line. It should be realised that in most areas the data density is limited and in many cases it will not be possible to have direct borehole information for an area where there is an apparent change in the rate of erosion. This applies especially to the German side of the Eems estuary, e.g. east of Eemshaven, where clear differences in migration rates are found, but no subsurface information is available.

In general migration rates of the -6 m contour line are low. One anomaly is formed by a small section on the south side of the Groote Gat where migration rates are locally higher than 21 m/yr and rapid widening has occurred. Zooming in on that specific location shows that four boreholes from 1981 are available (Figure 5.2). In contrast to almost any other available borehole in the area, these four boreholes show that the subsurface consists of sand instead of thick clay and peat layers (Figure 5.3). It is therefore not unlikely that this contrast in subsurface build-up played an important role in defining the area of strongest erosion. This figure also shows the lack of data in the eastern part of the Dollard region. Since no boreholes are available east of these four boreholes, it cannot be concluded with certainty that the drop in migration rates towards the east is due to a return of thick clay and peat layers or due to a change in hydrodynamic conditions.

Another area that stands out with a distinctive change in the rate of erosion is the Zuid Oost Lauwers, directly northeast of geological area 25 (Figure 5.4). Very high rates are visible to the north of this area, but closer to the area the rates drop sharply. Since there is very little information about area 25 it is not yet possible to say if this caused by a change in subsurface build-up, but the information that is available does not indicate substantial layers of erosion-resistant deposits at the -6 m NAP level. So it is possible that the drop in erosion rates should mainly be attributed to a change in hydrodynamic conditions.

Compared to the -6 m contour line the -15 m contour line is rather stable in the Eems estuary. In geological area 29-31 it is possible that this is the result of the presence of Potclay at that level. In front of the Eemshaven, where no Potclay is present within relevant levels, the erosion rates are higher than in areas 29-31. There is, however, a strong chance of the occurrence of thick Holocene clay layers in the Eemshaven area. The offshore extension of the Eems estuary crosses geological area 27, an area where Potclay and till are expected to frequently lie at the base of the channel and crop out in the channel wall (Medusa, 2010). It is striking that south and west of this geological area erosion rates are much higher than in the area itself. Since there are hardly any data available, it is again too early to attribute this predominantly to the presence of Potclay/till in that area, but it is not unlikely that their occurrence plays a significant role in the observed patterns of erosion in this area.

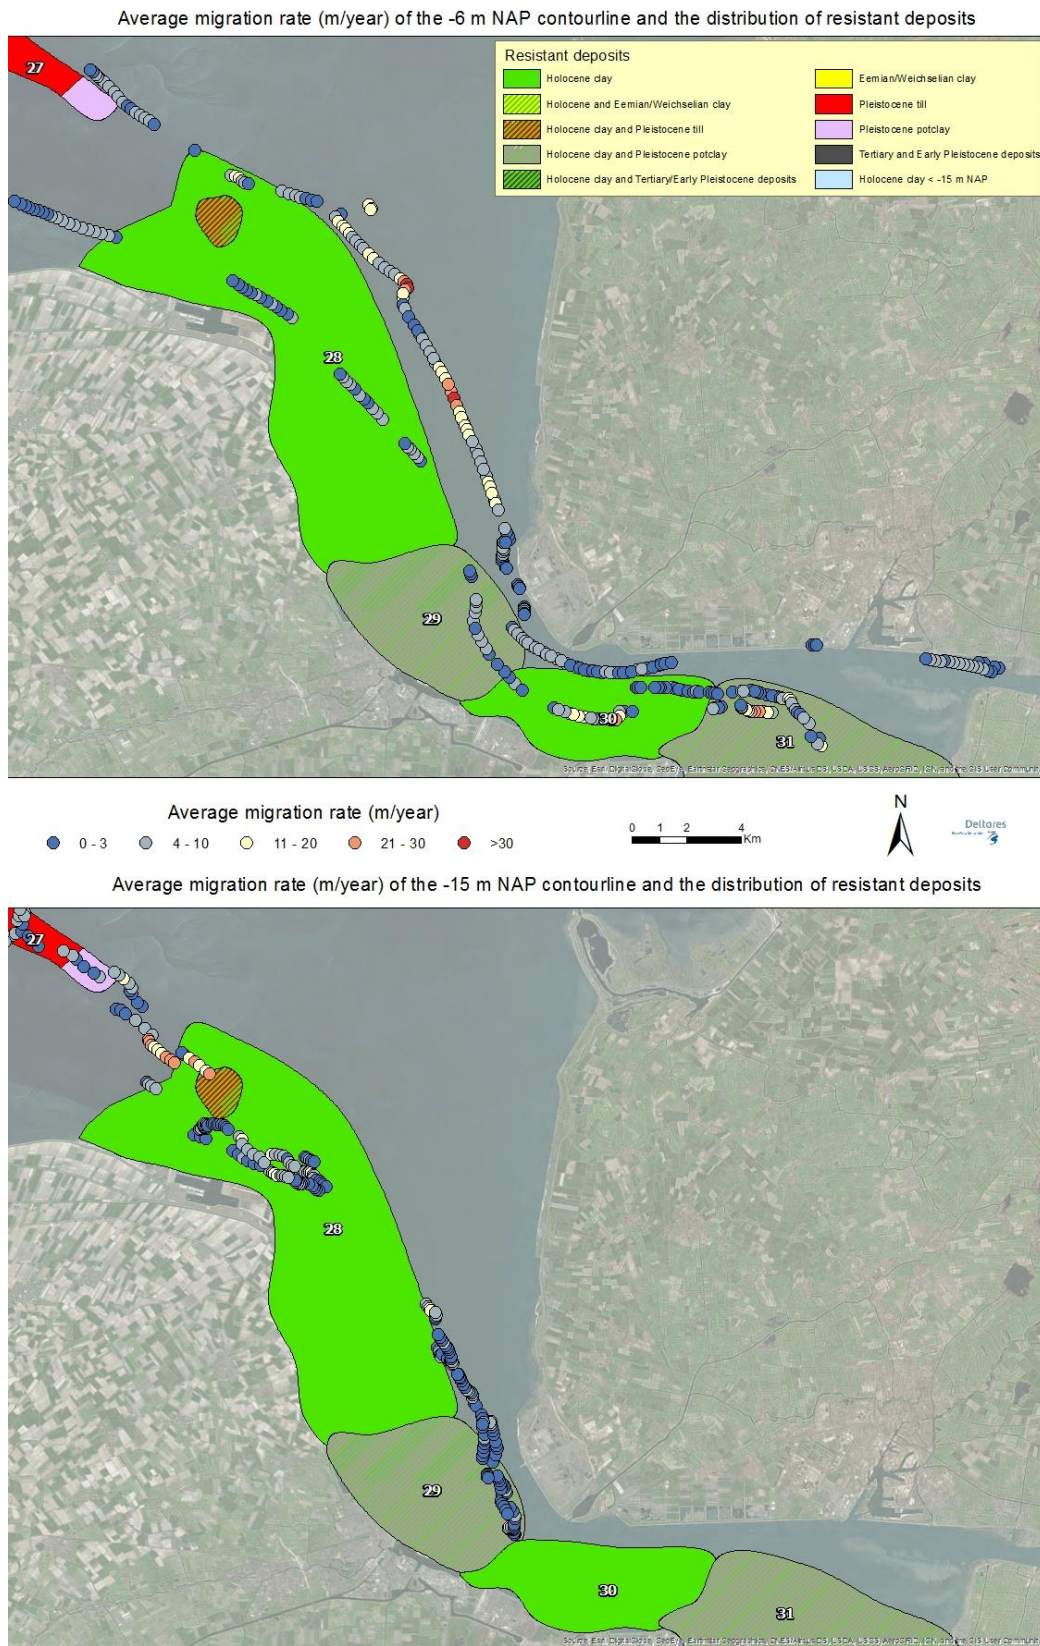


Figure 5.1 Average migration rates for the southern Eems-Dollard region and the distribution of resistant deposits.

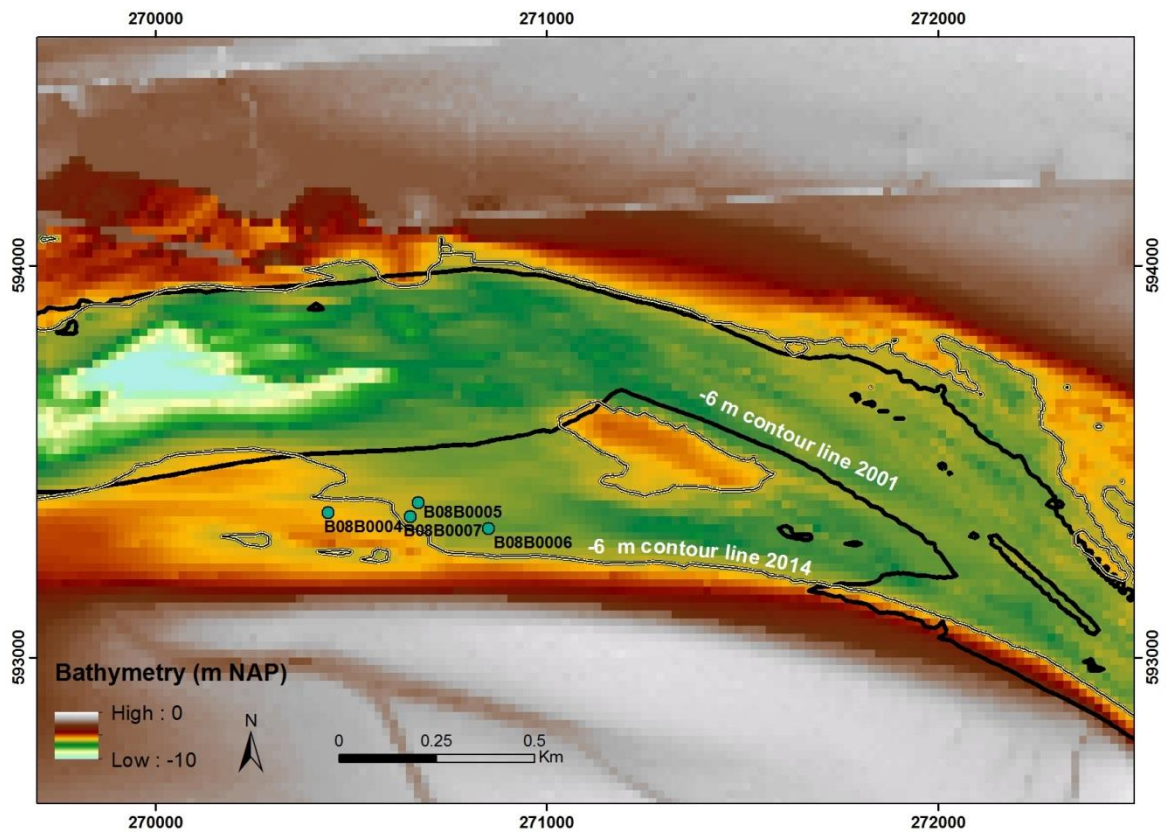


Figure 5.2 Close-up of the Mond van de Dollard-Groote Gat region with the two analysed contour lines from 2001 and 2014. In 13 years the contour line shifted more than 400 m in the central part of the figure, while to the west and east the rate of migration is low or sedimentation occurred.


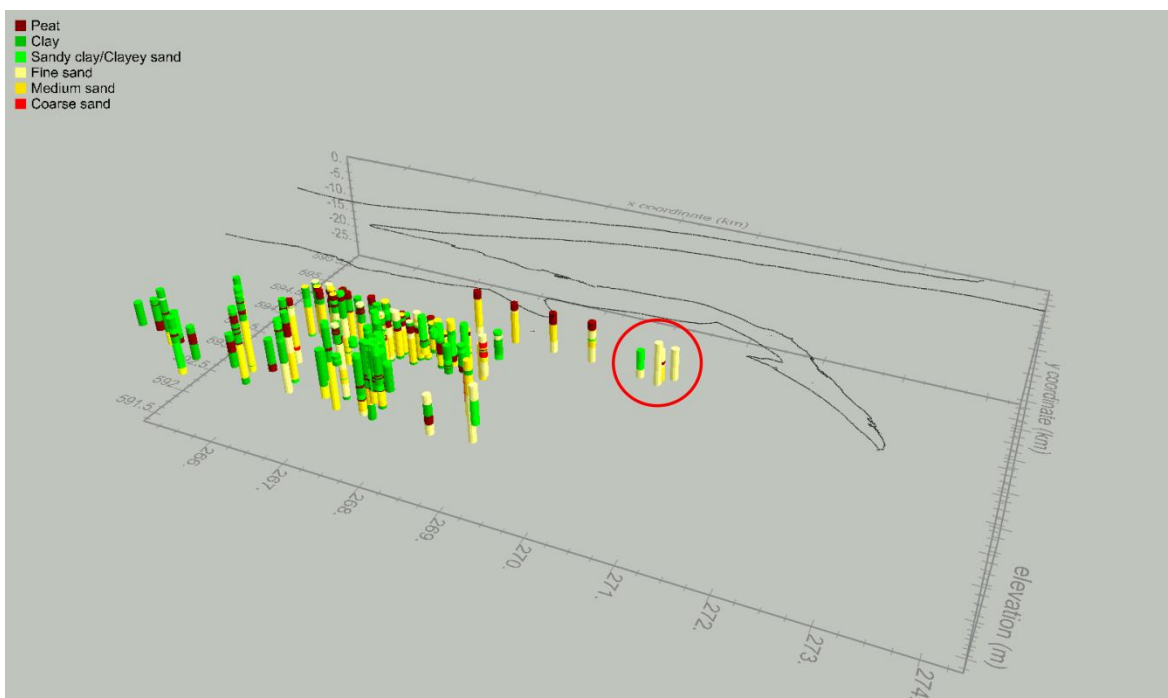


Figure 5.3 3D-plot of several boreholes in the Dollard regional. The black line is the -6 m contour line of 2001 (see also Figure 5.2). The boreholes that are encircled are the four boreholes in Figure 5.2.

Average migration rate (m/year) of the -6 m NAP contourline and the distribution of resistant deposits

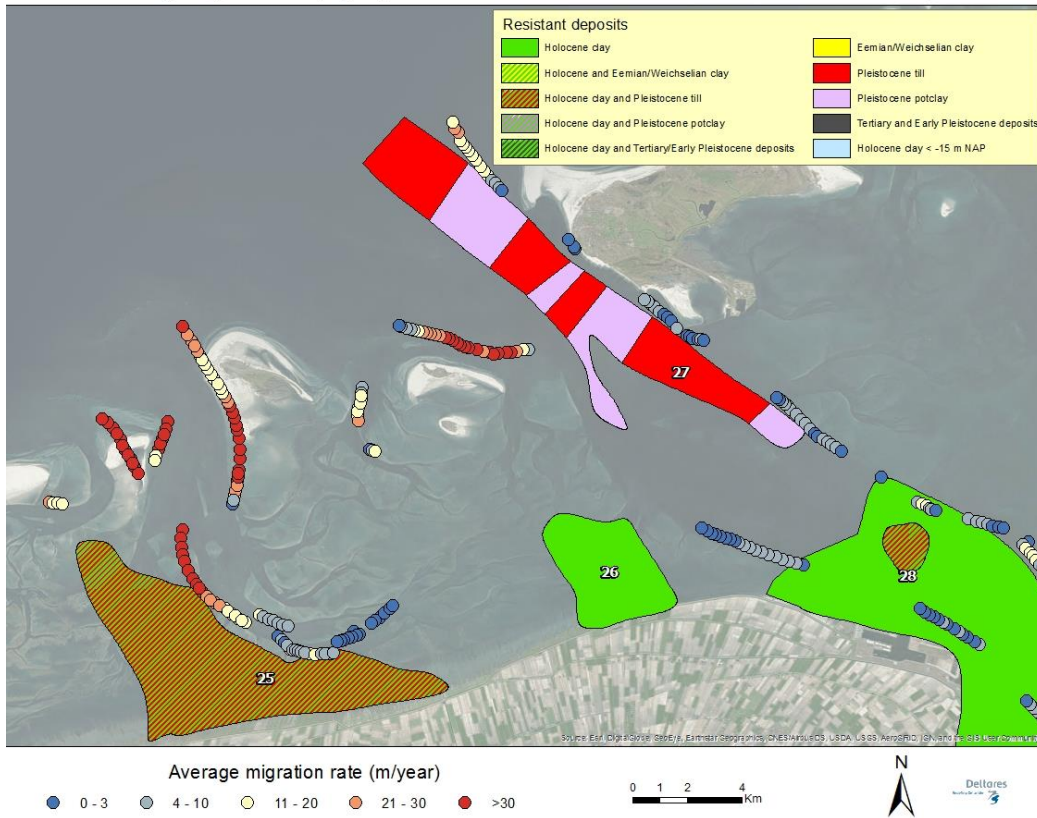

Average migration rate (m/year) of the -15 m NAP contourline and the distribution of resistant deposits

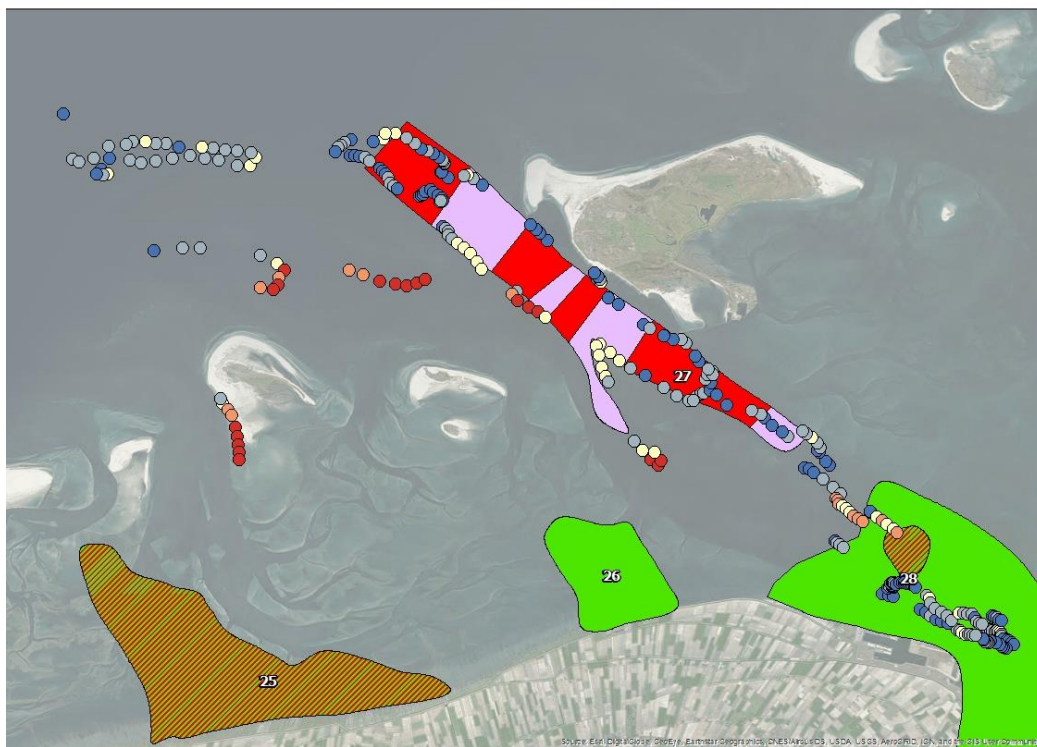


Figure 5.4 Average migration rates for the mouth of the Eems estuary and the Groninger Wad and the distribution of resistant deposits.


5.2 Wadden Sea

When looking at the entire Wadden Sea area there are a few hotspots of -6 m contour line migration. The first one is the area east of Schiermonnikoog that was briefly discussed in section 4.1. A few others are located in the ebb-tidal delta areas of the Borndiep and the Friesche Zeegat. In general there is a landward trend of a decreasing erosion rates that can be attributed to a decrease in size and hence hydrodynamic power of the channels. The importance of hydrodynamics is also apparent from the fact that overall the highest migration rates are observed along the outer bends of the channels.

At -6 m and above, larger patches of erosion-resistant deposits are expected in geological areas 9, 13, 15-17 and 22-23 (mostly Holocene clay and peat layers, possibly till in area 13). In area 22 no apparent influence of such deposits is present (Figure 5.6); in contrast, the erosion rates are relatively high for channels that far into the basin. In the other areas with erosion-resistant deposits, apart from area 9 where the -6 m contour line of the shoreface was not analysed for this study, migration rates are relatively low. However, in regions where erosion-resistant deposits frequently occur next to sandy deposits, like in the Texel-Vlieland area, no significant differences in migration rates are observed (Figure 5.7, Figure 5.8). A striking feature though is that the mentioned geological areas contain very few tidal channels and that the active tidal channels seem to flow around these areas. Another striking feature is that the tidal inlet between Texel and Vlieland is relatively small and that this is the only inlet that has large patches of erosion-resistant deposits. The question of course is whether the present tidal-channel pattern was influenced by the distribution of the erosion-resistant deposits or if the present distribution of erosion-resistant deposits is the result of erosion by tidal channels. What is known is that this area evolved rather dramatically after the connection of the Flevo Lakes with the North Sea. Before that time the area consisted of relatively high ground with extensive salt marshes, but not with large tidal channels like today (Vos et al., 2011). It is not unlikely that the tidal-channel system that initially evolved and later expanded in size remained rather stable due to the presence of erosion-resistant deposits along the flanks of the channels.

This hypothesis was tested by De Leeuw (2007) who studied the influence of Pleistocene deposits on the apparent stable position of the northern part of the the Vliestroom and the Westmeep. Her conclusion was that indeed these channels have hardly migrated in the last several thousands of years, but that this is very likely not caused by to the presence of erosion-resistant Pleistocene deposits. The channel parts she studied are, however, not embedded within erosion-resistant deposits on both sides and the hypothesis still stands as an explanation for the stable position of the channels in the Texel-Vlieland area. Although the analysis of De Leeuw made use of all available seismic data and borehole information at that time, she rightly concludes that the data density is still insufficient to determine the thickness and distribution of erosion-resistant deposits with enough certainty to assess the influence of these deposits with confidence. A detailed analysis of the profile of channel walls could possibly be used to distinguish between channels that are stable due to certain hydrodynamic conditions or due to the presence of erosion-resistant deposits. In the first case the channel wall is expected to be relatively smooth, while in the latter case the channel wall is expected to be more irregular and featuring one or more plateaus.

Average migration rate (m/year) of the -6 m NAP contourline and the distribution of resistant deposits

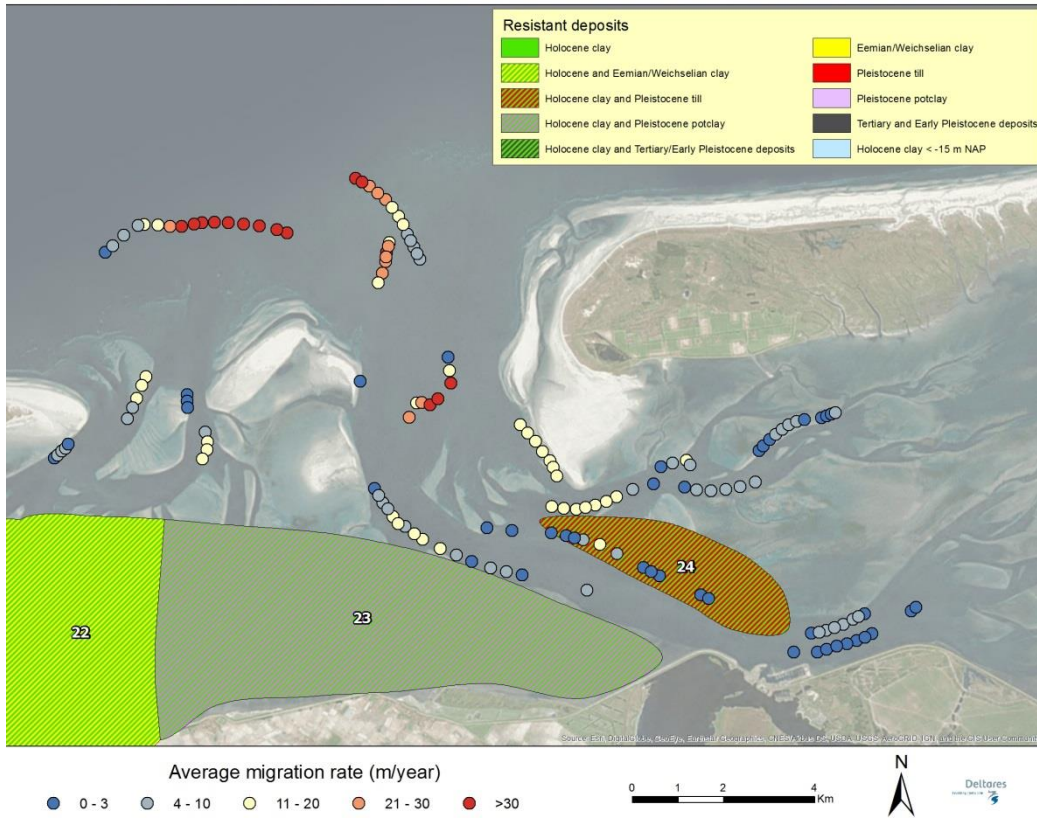

Average migration rate (m/year) of the -15 m NAP contourline and the distribution of resistant deposits



Figure 5.5 Average migration rates for the Friesche Zeegat and the distribution of resistant deposits.

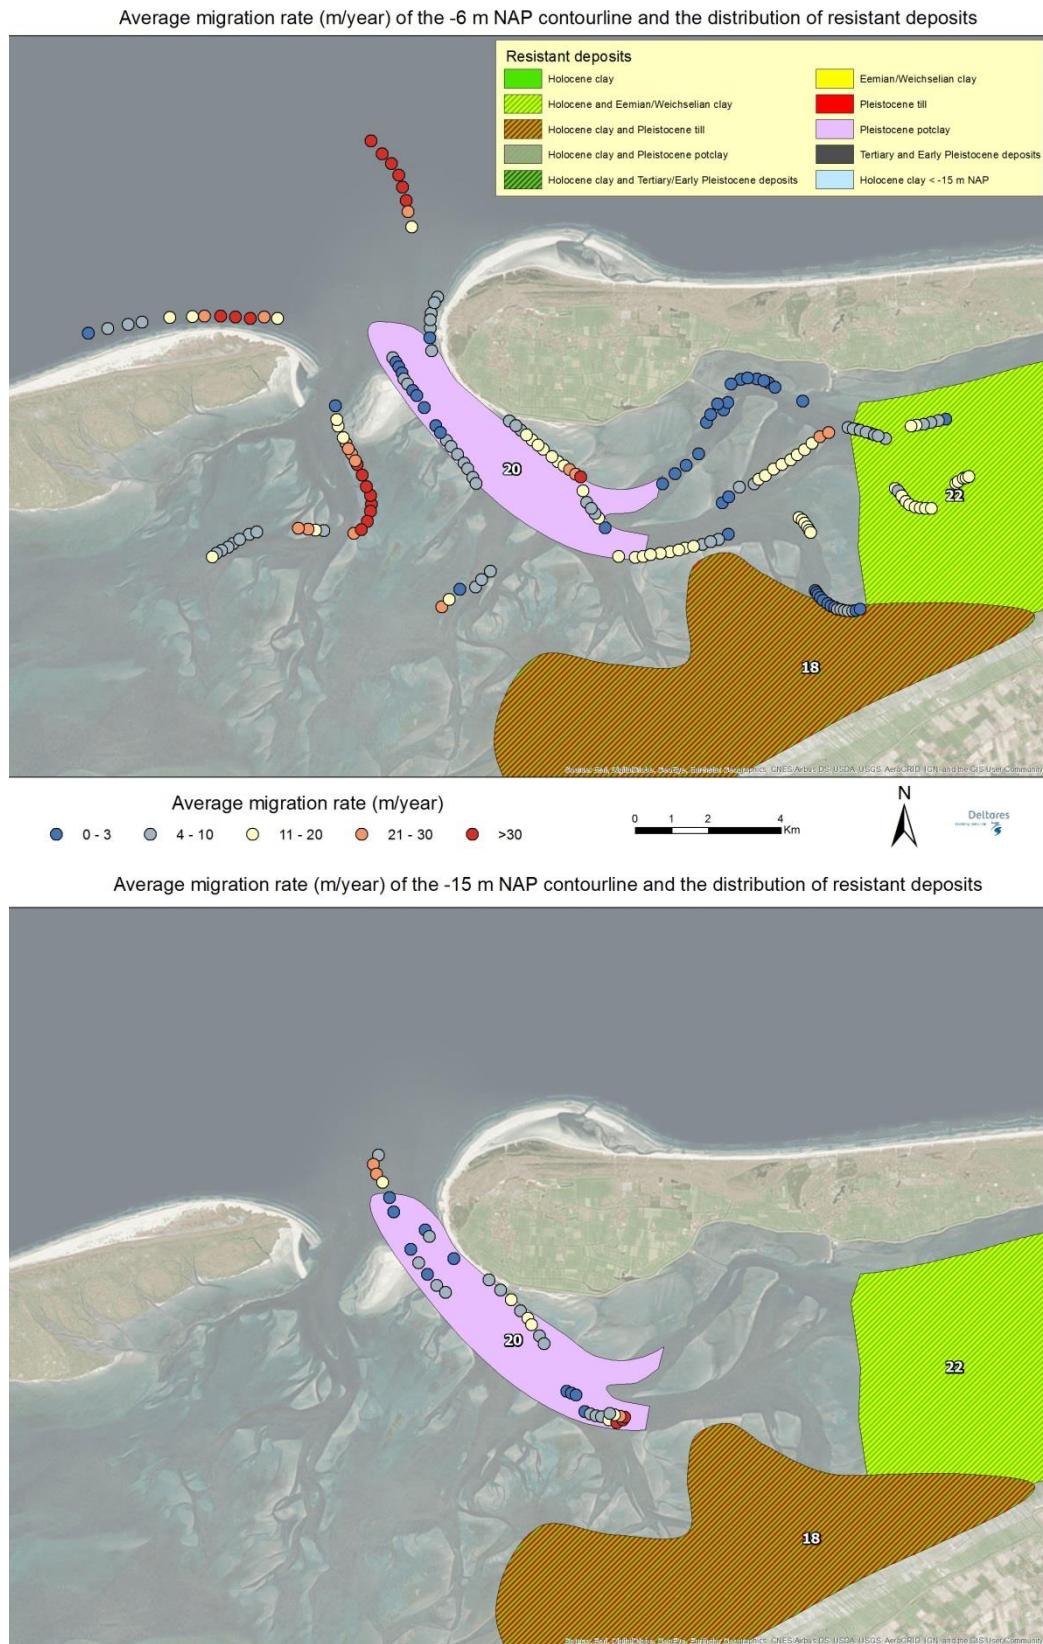


Figure 5.6 Average migration rates for the Borndiep inlet and the distribution of resistant deposits.

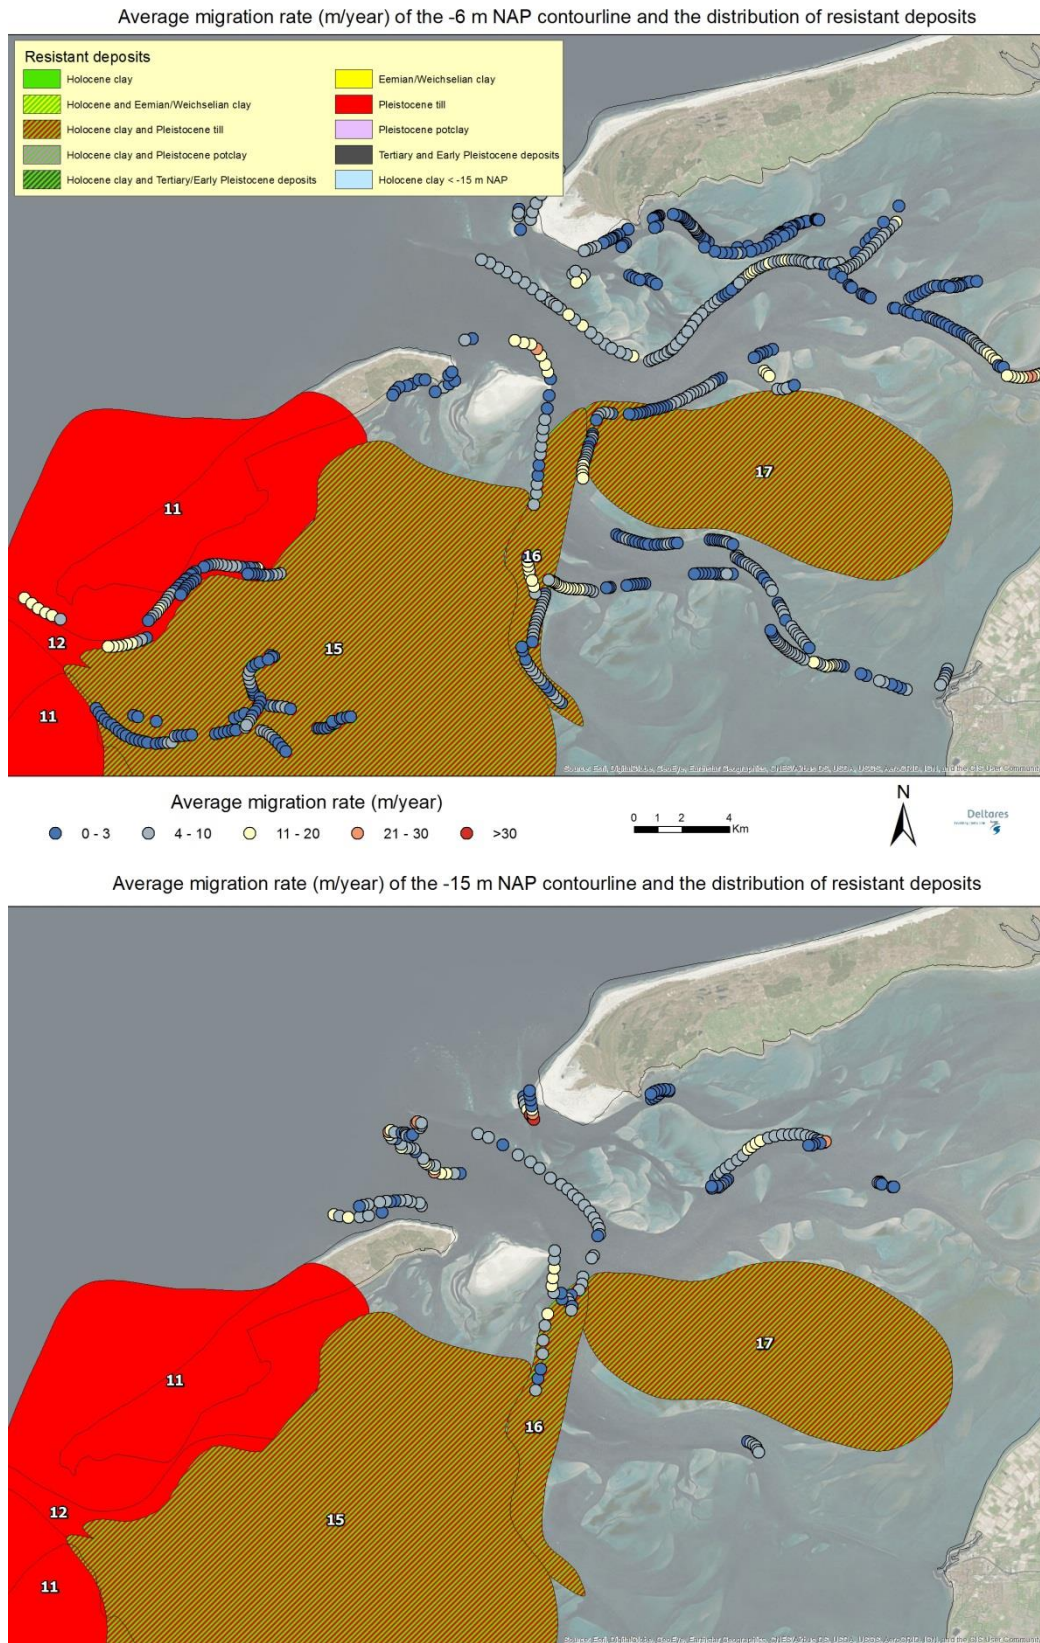


Figure 5.7 Average migration rates for the Vlie-Eierlandsche Gat and the distribution of resistant deposits.

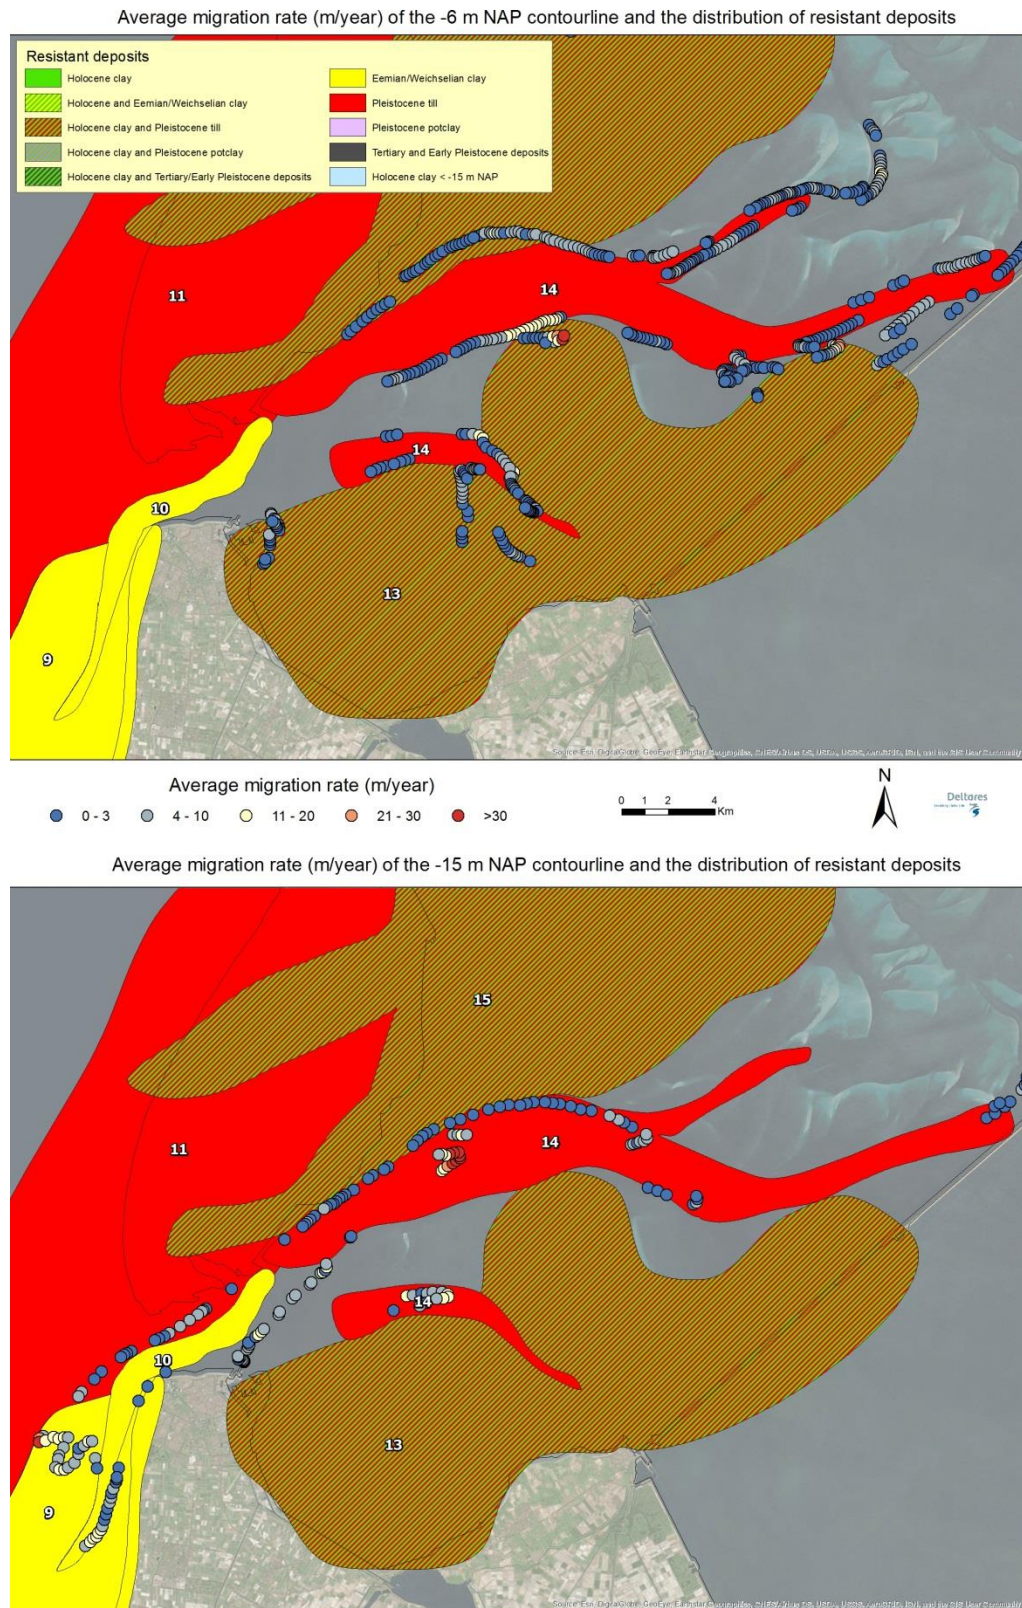


Figure 5.8 Average migration rates for the Texel inlet and the distribution of resistant deposits.

A small section of the Friesche Gat has parts deeper than -15 m NAP. It is located in the outer bend that migrated considerably towards the south. Directly south of this channel lies geological area 23 that has Potclay as high as -12 m NAP in its eastern part. It is likely that this will have an important influence on further southward migration or deepening of the southern part of the Friesche Gat (Figure 5.5). At present it is unknown whether the observed southward migration was caused by erosion of 'old' deposits or whether the channel is meandering within a body of sandy tidal-channel deposits. Such an evaluation requires careful analysis of boreholes or seismic data from before the erosion occurred. Also in geological area 20 (Borndiep, Figure 5.6) Potclay is expected to be of importance, but mainly in preventing the Borndiep from deepening. The Potclay starts at -23 to -25 m NAP (Van der Spek, 1994) and will therefore have limited influence on the rate of migration of the -15 m contour line.

Further towards the west, the -15 m contour line is present in the vicinity of the Vliestroom (Figure 5.7). Except for the southern end of the Vliestroom, where geological area 16 is located, there are no erosion-resistant deposits present that are of influence in this area. In area 16 Pleistocene till is present along the flanks of the channel and the deepest parts of the channel most likely reaches clay layers of the Urk and Eem Formations. In the upper part of the flanks Holocene clay and peat layers are expected. Migration rates are in the order of 2-11 m/yr, so not especially low compared to other sections of the Vliestroom.

In the Marsdiep-Texelstroom area it is clear that in the northeastern part the -15 m contour line has been very stable, while directly northeast of Den Helder it shifted considerably (Figure 5.8). Close to Texel this is most likely related to revetments, but these should not play a role in the part where the channel turns eastward. In that area glacial till is present below -10 m NAP and possibly hinders channel migration, although it is not certain whether the channel wall is in direct contact with the till or that a marine deposit is present in between the channel wall and the till. Since there are no erosion-resistant deposits present directly northeast of Den Helder, the difference in migration rates on different sides of the channel is possibly related to the difference in the build-up of the subsurface.

5.3 Zeeland

Morphological changes in the Western and Eastern Scheldt areas are strongly influenced by human activities, like the construction of the Eastern Scheldt storm-surge barrier and constant maintenance of the Western Scheldt channels by dredging and dumping. This paragraph explores whether the geological build-up of these areas still has an influence on the observed migration rates.

In geological area 4 the erosion-resistant deposits lie deeper than the -15 m contour line and hence they should have no influence on the migration rate of this contour line (Figure 5.9). In the mouth of the Westerschelde (Figure 5.10) the Oostgat channel is relatively stable and has been so for several decades, although this has been achieved only by revetments and nourishments (see also §4.4). Previous work on the Oostgat (Van der Spek, 1997; Hijma, 2017a) showed that on both sides Holocene clay layers can be present around and below -10 m NAP, but not at all places.

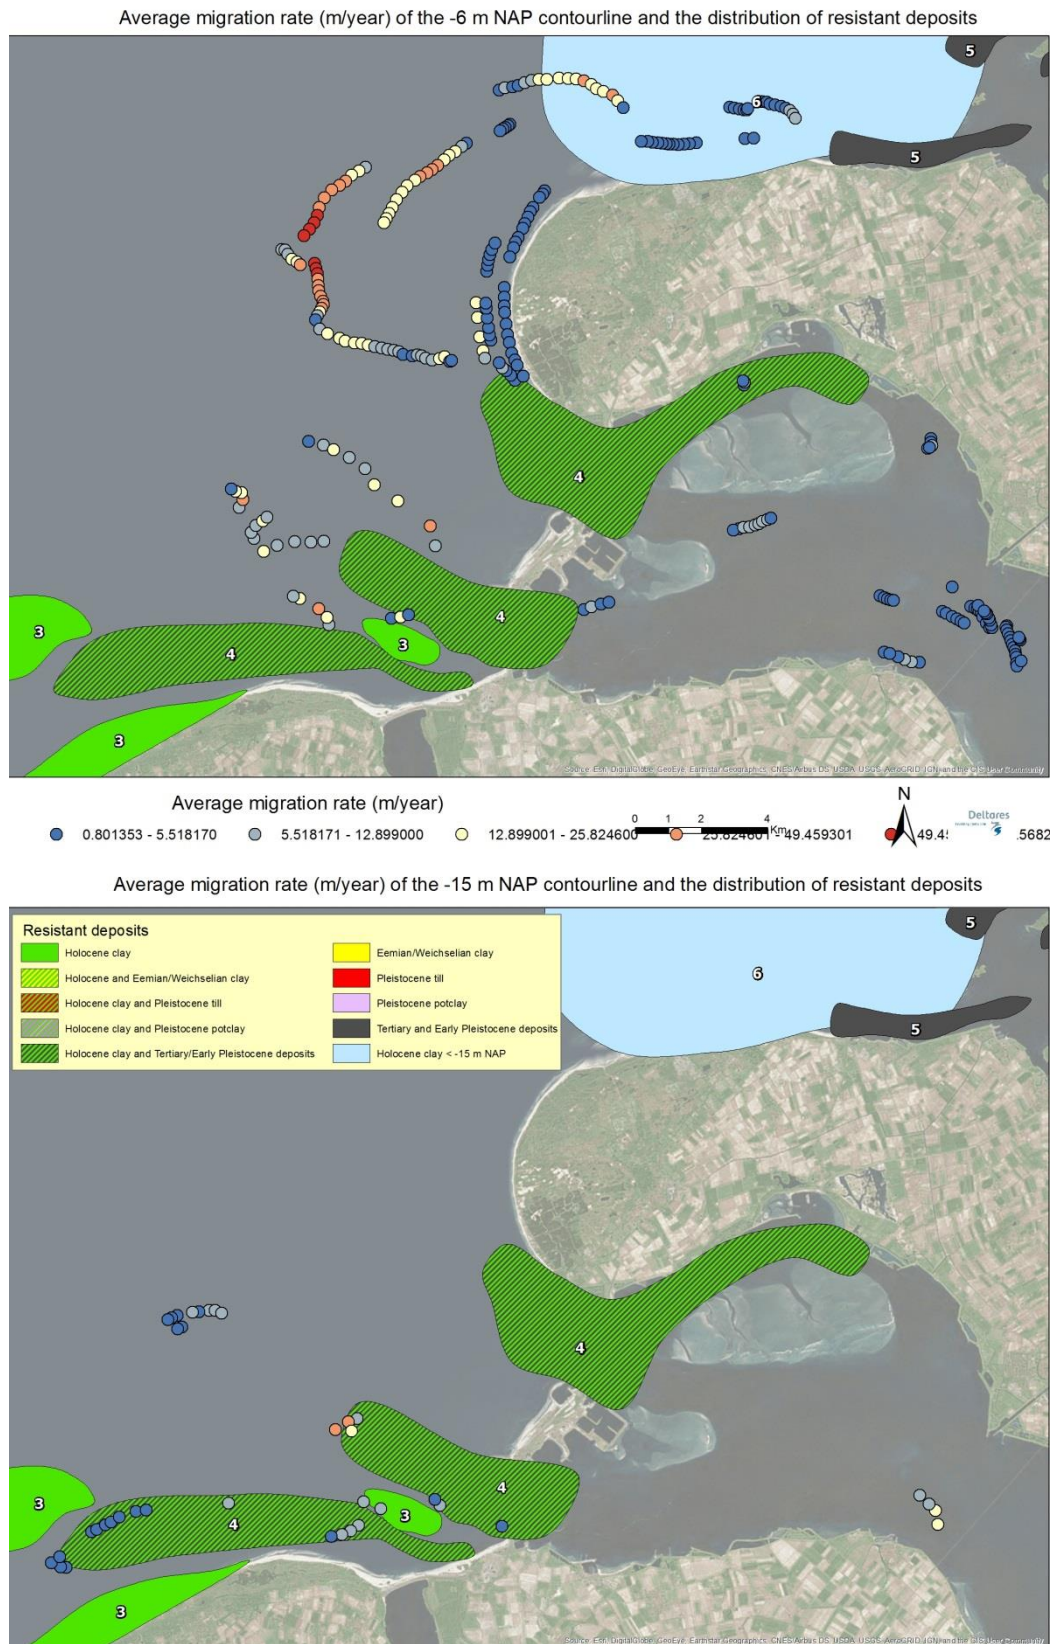


Figure 5.9 Average migration rates for the Oosterschelde-Grevelingen region and the distribution of resistant deposits.

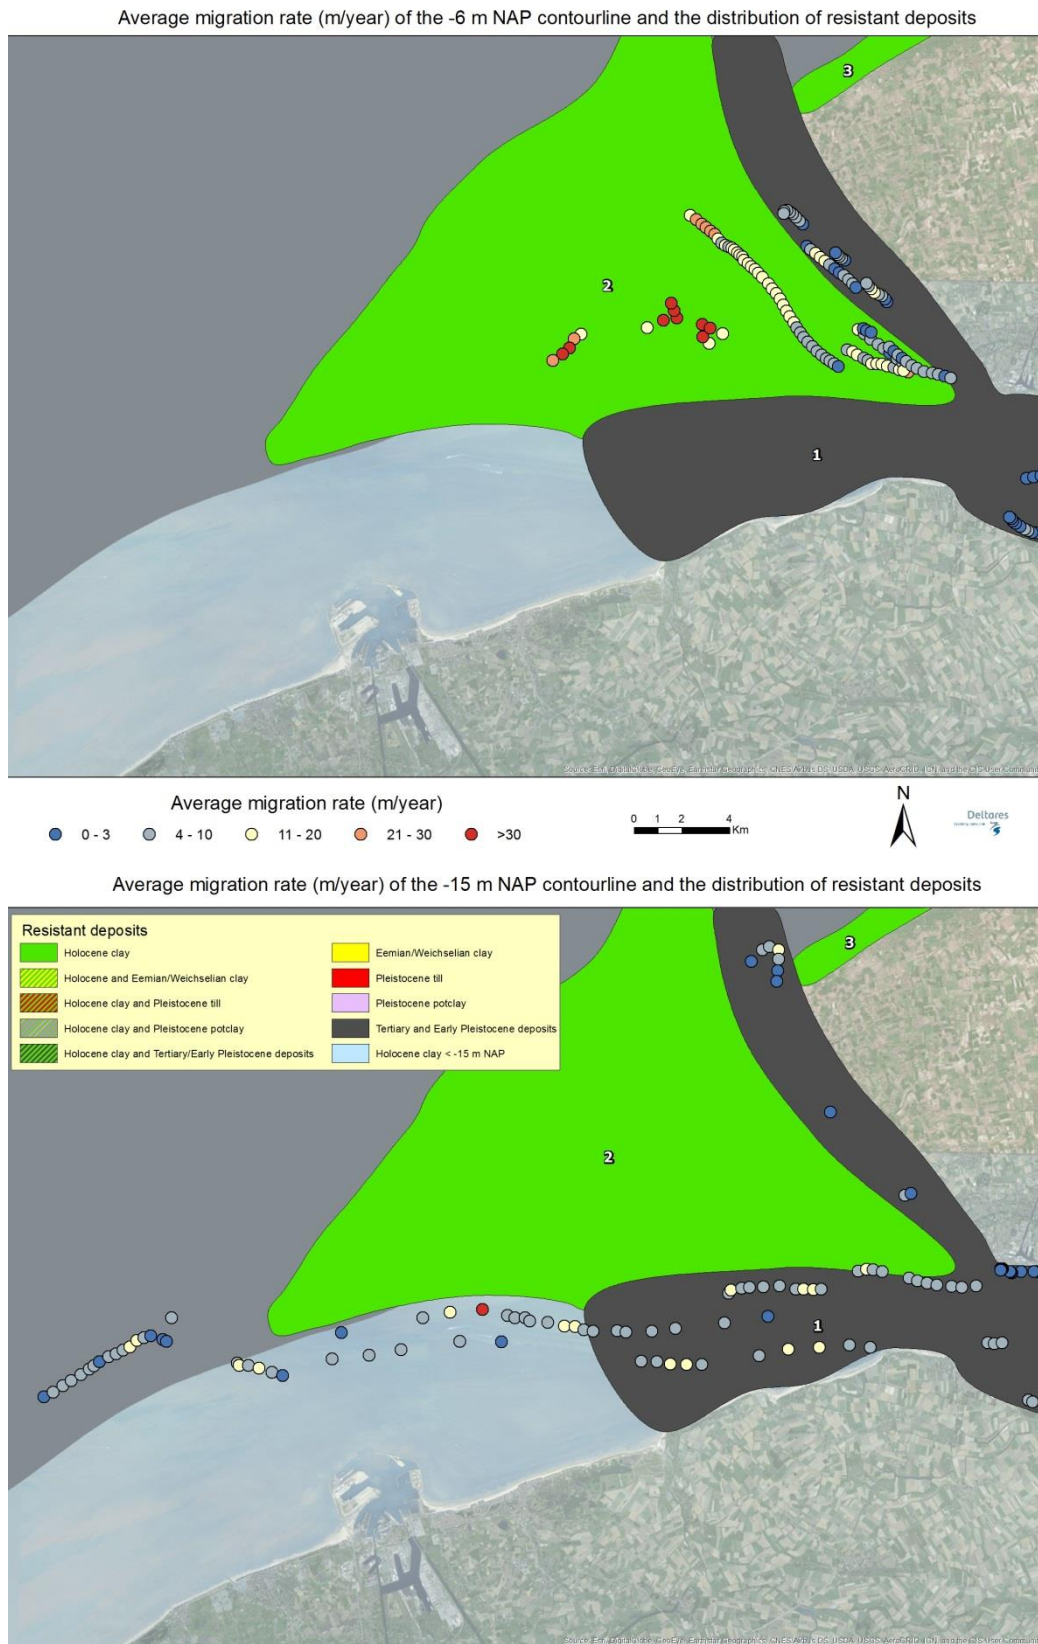


Figure 5.10 Average migration rates for the mouth of the Westerschelde and the distribution of resistant deposits.

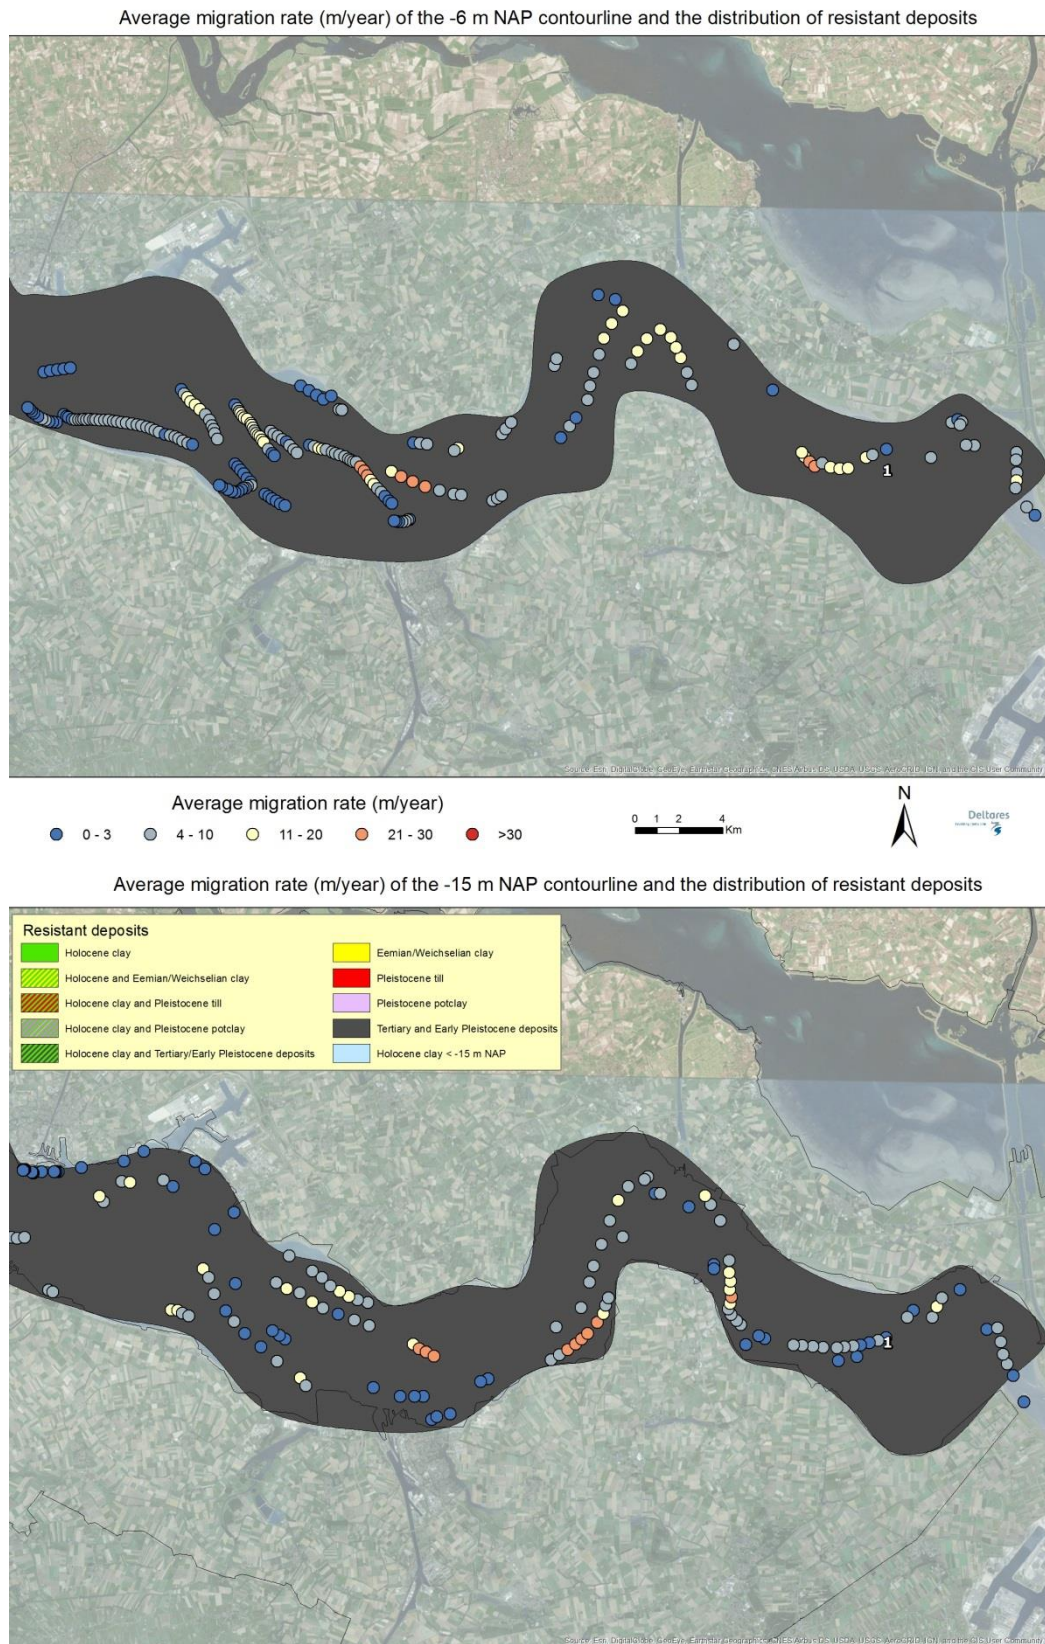


Figure 5.11 Average migration rates for the Westerschelde estuary and the distribution of resistant deposits.

In other parts of the Westerschelde no erosion-resistant deposits are present around the -15 m contour line and hence no influence of this type of deposits exists. An indirect influence of erosion-resistant deposits on the -15 m contour line is the fact that some of the deepest parts are in contact with stiff Tertiary and Pleistocene deposits (Van der Spek, 1997; Hijma, 2017a) that hinder deepening, but could stimulate widening. At the southern edge of the Vlake van de Raan clay layers can be expected at -15 m, but this seems not to result in relatively low migration rates.

Near the landward sides of several shoals and channels, patches of Holocene peat- and clay layers have been preserved, possibly influencing migration rates. Careful comparison of rates and distribution of these patches is needed in order to relate patterns in migration rates to the presence of erosion-resistant deposits. This was not feasible within the scope of the present study.

5.4 Thalweg migration during the last 30-90 years

Recently a report by Arcadis (Cleveringa en Geleynse, 2017) was published alongside hand-drawn shapefiles of the position of the thalweg of tidal channels in The Netherlands. For some tidal channels the oldest map used dates from 1983, while for other channels data from 1926 were available. The figures below plot all shapefiles and hereby give an impression of the lateral migration of the tidal channels during the last decades, so over longer periods than analysed in this study. The Arcadis report does not discuss the observed patterns.

When comparing the position of thalwegs over time with migration rates of shallower contour lines, it must be realized that these should not necessarily display the same pattern. The results in Chapter 3 show that several channels have widened on both sides, and hence a migration rate has been calculated, but the deepest part of the channel could have stayed at the same position. Nonetheless, when comparing the calculated migration rates with the thalweg shapefiles, there is a clear relationship: in areas with relatively high migration rates, like east of Schiermonnikoog (Figure 5.12), the thalwegs shifted considerably over the last decades, while in areas with low migration rates, like near the Vliestroom (Figure 5.13), the thalwegs were relatively stable. This seems to suggest that the pattern in migration rates between 1997-2002 and 2009-2014 is not just characteristic for that period, but that this pattern could be characteristic for much longer periods.

In the Wadden Sea there seems to be a distinction between thalweg migration west and east of Terschelling: west of Terschelling the overall migration rates are relatively low and east of Terschelling they are relatively high. This is not only true for the thalweg, but also for both the -15 and -6 m contour line. The largest tidal-channel system, the Vliestroom and Marsdiep, are located in the part with low rates, so there seems to be no obvious link between stream power and migration rates. Another effect that could also play a role, however, is that large systems move relatively slow anyway, because of the large volumes of sand that have to be transported in order to move.

In the Eems Estuary migration rates are somewhat lower again. Since in both the western Wadden Sea and in the Eems Estuary there are large areas with relatively shallow occurrences of erosion-resistant deposits, it is tempting to link the relatively low migration rates in these areas to the presence of these deposits. Especially tidal channels in the till area east of Den Helder and in between Texel and Vlieland have been remarkably stable. Still, also the Meep-channels north of geological area 17 were very stable, confirming De Leeuw (2007), but without an apparent influence of erosion-resistant deposits. Clearly, also other factors than the local subsurface build-up, e.g. hydrodynamic or human, play a role in determining the stability of a tidal channel.

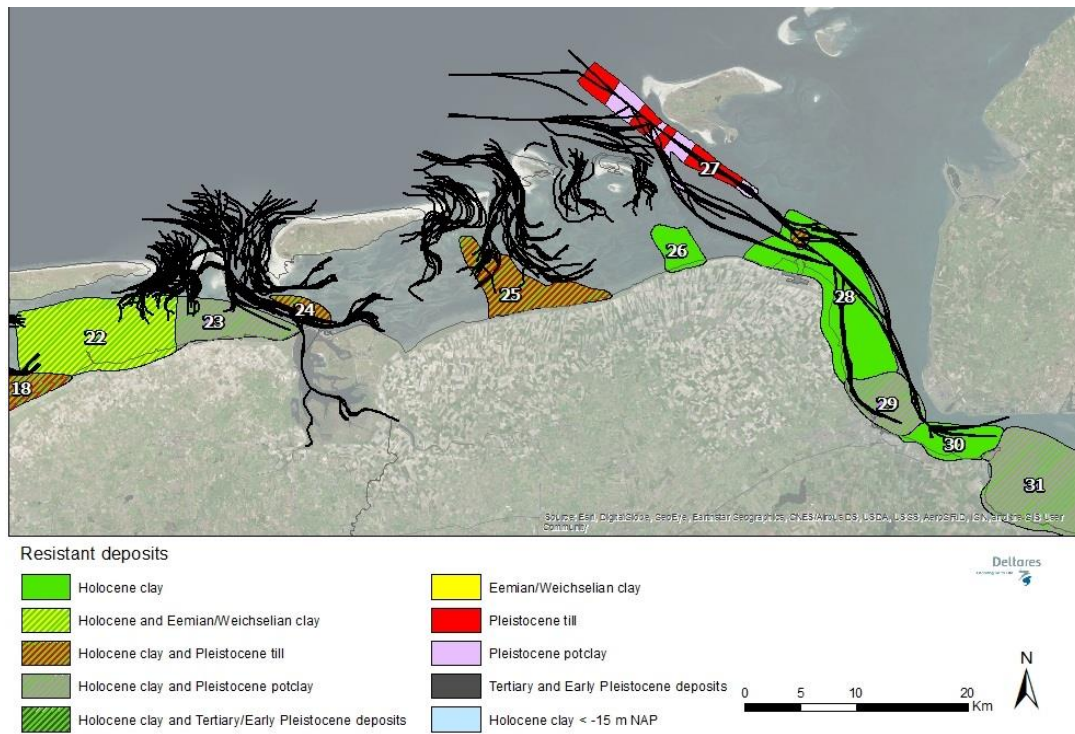


Figure 5.12 Mapped thalwegs over several decades in the eastern Wadden Sea (Cleveringa en Geleynse, 2017) plotted with the areas with erosion-resistant deposits (Hijma, 2017a).

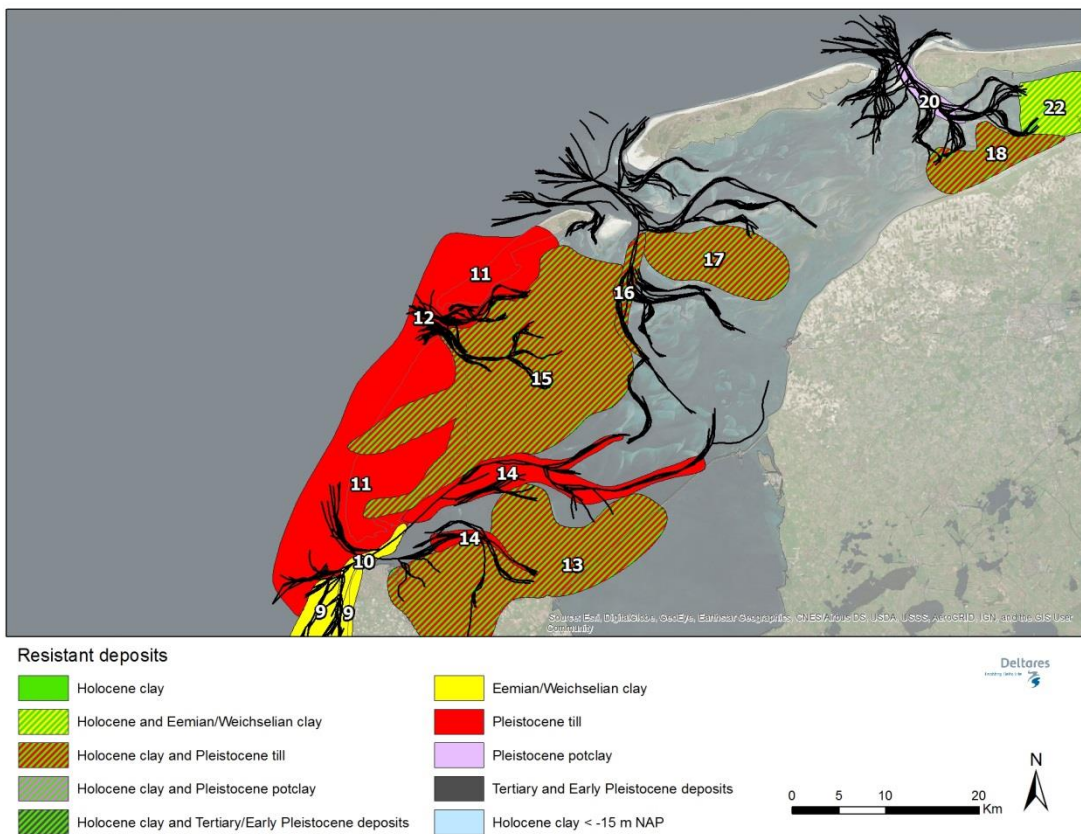


Figure 5.13 Mapped thalwegs over several decades in the western Wadden Sea (Cleveringa en Geleynse, 2017) plotted with the areas with erosion-resistant deposits (Hijma, 2017a).

In the Scheldt-area the positions of most of the thalwegs have been very stable during the last decades (Figure 5.14). This especially true for the Wielingen, the channels along the tip of Walcheren, the Roompot north of Walcheren and main navigation channel south of Walcheren (Rede van Vlissingen-Everingen). As mentioned earlier, especially the main navigation route in the Wielingen-Western Scheldt is heavily maintained and migration of the thalweg is obviously strongly influenced by these activities. In parts of the Wielingen-Western Scheldt the deepest parts are in touch with erosion-resistant deposits, hereby preventing rapid deepening, and this could have an influence on the stable position of the thalwegs as well. More active areas are channels in the ebb-tidal delta of the Oosterschelde and the channel systems in the central and southern part of the Western Scheldt.

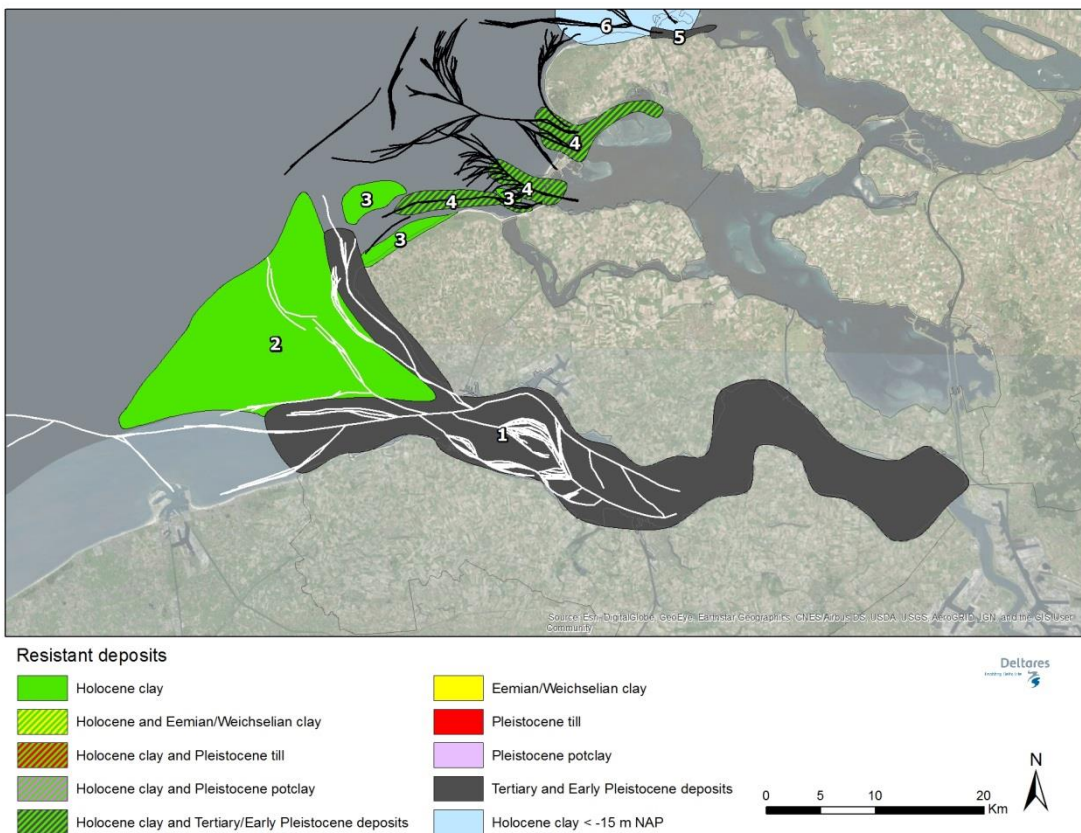


Figure 5.14 Mapped thalwegs over several decades in the Scheldt-area (Cleveringa en Geleynse, 2017) plotted with the areas with erosion-resistant deposits (Hijma, 2017a).

6 Conclusions

This study presents the first quantification of average rates of tidal-channel migration due to erosion on a national scale. For this a semi-automated method was developed using mosaicked bathymetric datasets (Vaklodingen) from different time periods, hereby calculating the migration rate of the -15 and -6 m NAP contour lines. In a next step these migration rates were compared with mapped distributions of erosion-resistant deposits in the coastal zone and with reconstructions of thalweg positions during the last decades to make a first assessment of the relation between migration rates and the build-up of the subsurface. From this is concluded that:

- 1) There are large variations in average migration rates between the periods 1997-2002 and 2009-2014. The highest rate of migration for the -15 m contour line is ~70 m/yr, for the -6 m contour line 90 m/yr. On average the -15 m contour line migrated ~7 m/yr, the -6 m contour line ~8 m/yr. The standard deviation (2σ) around the migration rates is estimated to be 0.8 m/yr.
- 2) The highest rates are generally found in the outer bends of the tidal channels and in general the migration rates decrease in a landward direction. These two general observations are related to hydrodynamic processes and are not related to the presence of erosion-resistant deposits.
- 3) In the Eems-Dollard-Groninger Wad region erosion-resistant deposits are abundantly present and within relevant depths. There are distinct changes in the rate of migration for which indications exist that they can be attributed to changes in the build-up of the subsurface, but the data density is not sufficient to test this hypothesis.
- 4) In the Wadden Sea, the tidal channels associated with the Groninger Wad, Friesche Zeegat and Borndiep inlet show on average much higher migration rates than the tidal channels associated with the other inlets. An analysis of thalweg migration of tidal channels during the last 30-90 years (Cleveringa en Geleynse, 2017) indicates that also on longer time scales this difference can be observed.
- 5) This distinct difference in migration rates between the western Wadden Sea and the eastern Wadden Sea is tentatively linked to the presence of large patches of till-peat-clay sequences in the western Wadden Sea. There are, however, also some channels that show low rates of migration that seem not embedded within erosion-resistant deposits, indicating that under certain hydrodynamic conditions migration rates can be low as well.
- 6) In the Scheldt-area the highest rates of migration are found in the ebb-tidal deltas and along some shoals in the Western Scheldt.

- 7) In most of the Scheldt-region there seems to be little to no influence of erosion-resistant deposits on the migration rate of the studied contour lines. Some of the deepest parts in the Western Scheldt, below -15 m NAP, are likely in contact with erosion-resistant deposits that hinder deepening and possibly stimulate widening. Along the edges of the Western Scheldt there are relatively large patches of clay and layers present at shallow depths, but at these points it is uncertain how close to the active channels they are present and if they have any influence on migration rates.
- 8) A more general conclusion is that although the direct influence of erosion-resistant deposits on migration rates is not always easy to “prove”, the migration rate in areas with large patches of erosion-resistant deposits is on average quite low. This applies especially to areas with the presence of till-peat-clay sequences (western Wadden Sea) and in areas with Potclay-peat-clay (Eems-Dollard) sequences. This means that the hypothesis that the presence of erosion-resistant layers will significantly influence migration rates and channel deepening still stands and is likely true. There is good potential to further explore the assessed relation between migration rates and the build-up of the subsurface, see also the recommendations.

7 Recommendations

To take this line of research a step further and to make progress in integrating this type of knowledge into numerical models that are used to predict morphodynamic evolution in general and tidal-channel migration in particular, the following recommendations are given:

- 1) If erosion-resistant deposits hinder the lateral migration of tidal channels, it is expected that the channel walls of such channel are irregular and possibly contain plateaus. A comparison should be made of the profiles of channels walls for which the influence of erosion-resistant deposits is expected and channel walls where such an influence is not expected. This could possibly also allow distinguishing between channels that are stable due to the presence of erosion-resistant layers and those that are stable due to certain hydrodynamic conditions.
- 2) To increase the dataset that can be used to improve our understanding of patterns in rates of migrations as well as the predictive value of numerical models, the analysis should be expanded to periods before 1997-2002.
- 3) Since several of the larger tidal channels are much deeper than -15 m, it would be needed to include an analysis of the migration of deeper contour lines.
- 4) It would be fruitful to have a discussion with numerical modellers about the results of this study and how they can be integrated or used in their models. This discussion is also needed to be able to understand the combined influence of hydrodynamic processes and the build-up of the subsurface on migration rates.
- 5) A literature study is still needed to distil knowledge about differential erodibility and its influence on tidal-channel migration and long-term coastal evolution.
- 6) The analysis of the influence of erosion-resistant deposits on migration rates in this study was explorative and often hindered by a lack of data. To bring this research further more focused analyses are needed in order to be able to quantify the erodibility of different types of deposits. This quantification is needed as input for the numerical models. At present, the most logical focus areas would be the western Wadden Sea, including the Nieuwe Schulpengat area where a lot of data is available, the Eems-Dollard region and parts of the Western Scheldt. These are the areas where the influence of erosion-resistant deposits seems most apparent. Within the focus area sites should be selected that have irregular channel walls and preferably a relatively high data-density of subsurface information.
- 7) For the future, it should be considered to bring big blocks of different erosion-resistant deposits to the lab and measure the erosion rate when they are exposed to flowing, sediment containing, water.

References

- Blauw, M., De Kleine, M., Vonhögen-Peeters, L., Van Heteren, S., De Weert, J., Van Gaans, P., 2017. Fase 3 Rapportage - Geologisch onderzoek zoekgebieden Noordzee zandwinning (concept). Deltares report 1230624-003-BGS-0001, 87 pp.
- Cleveringa, J., Geleyense, N., 2017. Shapefiles historische ligging geulen buitendelta's van Waddengebied, Zeeland en Zuid-Holland. Arcadis report
- De Leeuw, V.P.M., 2007. De rol van Pleistocene afzettingen op het verloop van geulen in de Nederlandse Waddenzee. Utrecht University, Utrecht, 23 pp.
- Erkens, G., Hijma, M.P., Peeters, J.H.M., Van Heteren, S., Marges, V.C., Vonhögen - Peeters, L.M., 2014. Proef Indicatieve Kaart Archeologische Waarden (IKAW) Noordzee. Deltares report 1206731-000-BGS-0013, 87 pp.
- Hijma, M.P., 2017a. Geology of the Dutch Coast. Deltares report 1220040-007-ZKS-0003, 43 pp.
- Hijma, M.P., 2017b. Quicksan resultaten Noordzee Zandwinproject op huidig inzichten lange termijn kustontwikkeling. 15 pp.
- Medusa, 2010. Interpretatie geologische opbouw vaarweg Eemshaven-Noordzee. Medusa rapport 2010-P-310V1.
- Van der Spek, A.J.F., 1994. Large-scale evolution of Holocene tidal basins in the Netherlands. Ph.D.-thesis, Utrecht University, Utrecht.
- Van der Spek, A.J.F., 1997. De geologische opbouw van de ondergrond van het mondingsgebied van de Westerschelde en de rol hiervan in de morfologische ontwikkeling. TNO-NITG, 65 pp.
- Vos, P.C., Bazelmans, J., Weerts, H.J.T., Van der Meulen, M.J., 2011. Atlas van Nederland in het Holoceen. RCE, TNO en Deltares, , 94 pp.